


Wiring

Having correctly identified the wiring from your existing light fitting, pull the mains wire through the hole and connect to the quick fit connection block inside the product in the following way:

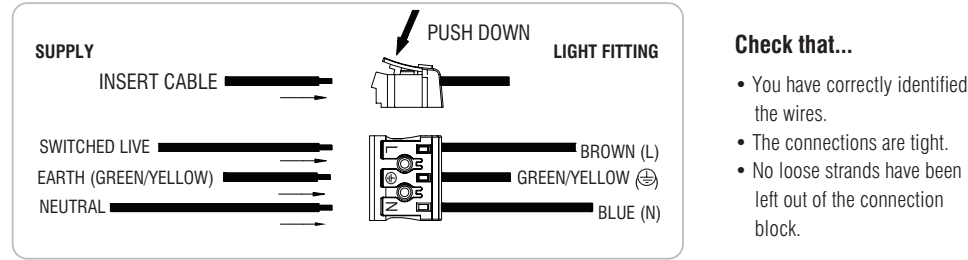

Technical data

Supply Voltage: 220-240 V~, 50 Hz

Bulb Type: 8W LED module CCT, 3000/4000/6000K

This product contains a light source of energy efficiency class **D**.

 Non-replaceable light source

 Non-replaceable control gear

 Conformity with all relevant UKCA Directive requirements.

 Conformity with all relevant EC Directive requirements.

 This product is Class 1, must be connected to earth.


 Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or local store for recycling advice.

 This product is not suitable for dimming.

 This product is rated at IP44.

Care and Safety

We recommend cleaning with a soft dry cloth. Do not use solvents or abrasive cleaners as these could damage the finish. For your safety, always switch off the power supply before changing lightbulbs, or cleaning.

 This bulb is protected by a PC shade. This part must be replaced immediately should the PC shade become cracked or damaged. This fitting must not be used without the PC shade in place.

For further information, please visit <https://www.lighting-info.co.uk/113573>

V2 23/11/2024
UK Manufacturer: BH17 7BY
EU Manufacturer: Brilliant AG,
Brillantstrasse 1, D-27442 Gnarrenburg

saxby
lighting

Instruction manual

Jude CCT Wall

113573



www.saxbylighting.com

saxby
lighting

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

Warning

This is a Class 1 product and must be earthed.

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with the IEE Wiring regulations and current Building Regulations.

Check the pack and make sure you have all the parts listed.

To prevent electrocution switch off at the mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a circuit with a 30mA RCD fitted.

If replacing an existing fitting, make a careful note of the connections.

Take care not to drill into any pipes or mains cables beneath the surface during mounting holes preparation.

If any modification is made it will invalidate the warranty and may render the product unsafe.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

Layout

Plan the desired layout of these fittings carefully, ensuring the cables will reach the distances between the junction box and the light fitting.


Avoid locating any cables in positions that would cause a hazard. Position cables and junction boxes (not supplied) away from areas where they may be at risk from being cut, trapped or damaged.

The mains supply cable must have a minimum cross section area of 1.0mm².

Cables must be protected using suitable conduit or plastic trunking.

This product has special protection against the ingress of moisture and is IP44 rated.

Shaver Socket

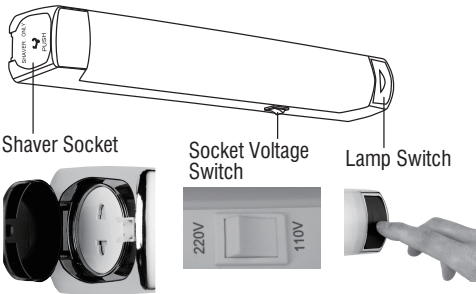

The output current rating of the shaver socket is 0.1A when 110V and 0.05A when 230V.

The shaver socket is powered by a 10W isolating transformer and is only intended for use with electric shavers, electric toothbrush chargers and similar products.

Any appliance connected to the socket must not exceed the 10W power output as this could cause damage and overheating to occur. Always check your appliance instructions to ensure the power requirements are less than 10W.

Installation

Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, carefully note the position of each set of wires.

Note that the switch is turned off before installation.

Ensure the wall is capable of holding the weight of the product. Take care to avoid damaging any concealed wiring and pipes. The correct fixings should be used for brick or cavity walls. Ensure that the wall back is level.

- Remove the rear panel from the lamp body.
- Hold the rear panel in position and mark the location of the fixing holes. Place rear panel on the designated wall and mark the location with a marker pen. Drill the 60mm deep holes in the wall with a Ø6mm drill bit and insert the expansion tube into the hole.
- Pull the mains wire through the hole then fit the rear panel to the wall with screws in position.
- Choose your preferred colour by using the CCT switch on the driver. The default setting is 3000K.
- Wire as detailed wiring diagram.
- Fit the lamp body into the rear panel.
- Replace fuse or circuit breaker and switch on. Your light is now ready for use.

