


Wiring

Having correctly identified the wiring from your existing light fitting, pull the wire through the hole and connect to the connection block inside the product in the following way:

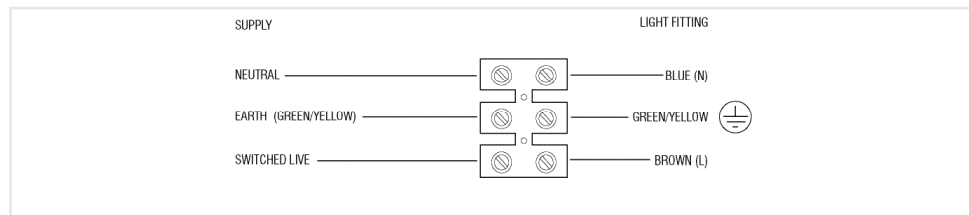


Check that...


- You have correctly identified the wires.
- The connections are tight.
- No loose strands have been left out of the connection block.
- When completed, ensure that there are no bare or loose strands of wire exposed, and cover all exposed areas of the connection block with 2 layers of insulation tape.

Care and Safety

- We recommend cleaning with a soft dry cloth. Do not use solvents or abrasive cleaners as these could damage the finish.
- For your safety, always switch off the supply before cleaning.



This LED's are protected by a plastic lens. The lens part must be replaced immediately should it become cracked or damaged. This fitting must not be used without the plastic lens in place.

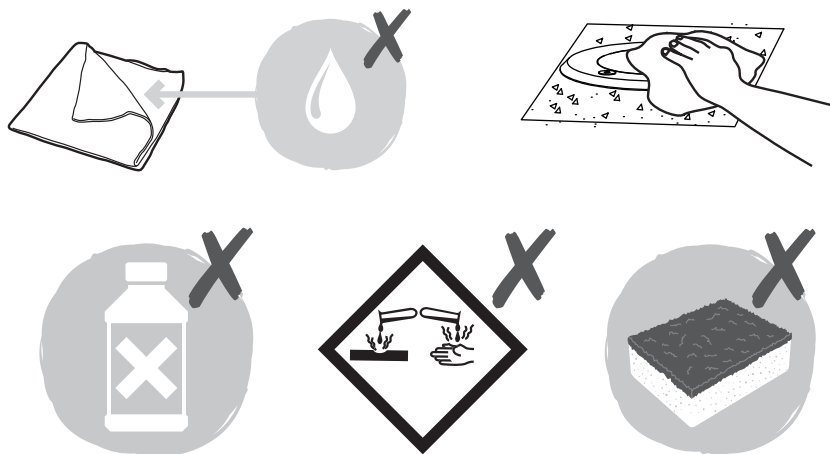

Iss .2 23/11/2018

Instruction leaflet

Hoxton Recessed

79195



saxby
lighting

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

Warning

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with IEE Wiring regulations and current Building Regulations.

Check the pack and make sure you have all of the parts listed.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting.

Ensure other persons cannot restore the electrical supply without your knowledge.

This light fitting should be connected to a fused circuit.

If replacing an existing fitting, make a careful note of the connections.

This product is unsuitable for immersion in water.

This light fitting should be connected to a circuit with a 30mA RCD fitted.

Cables must be protected using suitable conduit or plastic trunking.

The mains supply cable must have a minimum cross sectional area of 1.0mm².

This system contains non-replaceable parts and cannot be serviced. If damage occurs the part should be scrapped.

Take care not to drill into any pipes or mains cables beneath the surface during mounting holes preparation.

This product is not suitable for location in or near a marine environment.

Technical data

Supply Voltage:	240V~, 50 Hz
Bulb Type:	6W LED COB 4000K
	The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
CE	Conformity with all relevant EC Directive requirements.
WEEE symbol	Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or local store for recycling advice.
Earth symbol	Class I product, must be connected to earth.
Dimming symbol	This product is not suitable for dimming.
IP67	Jet-proof

Installation

- Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, carefully note the position of each set of wires.
- Note that the power needs to be isolated/switched off at the fuse board.
 - Plan the desired layout of this fitting carefully, ensuring the cables will reach the distance between the junction box and the light fitting.
 - Decide on the position of the luminaire. Depending on the location, an approved outdoor rated plug and socket may be required. Alternatively an approved outdoor rated external terminal block may be used.
 - Cut a 100mm diameter hole in the mounting surface. The hole must be at least 123mm deep to allow the product to sit properly. Take care not to damage any pipes or cables beneath the mounting surface. Ensure that adequate room is left for the cable.
 - **Use a wrench and screwdriver (not provide) to adjust the light source to the desired angle before installation. (Angle range: turn left 20°and turn right 20°)**
 - Avoid locating any cables in positions that would cause a hazard. Position cables and connector block away from areas where they may be at risk from being cut, trapped or damaged.
 - If the unit is to be used in a submerged location, seal the unit into position using silicone sealant.
 - If the unit is to be fitted in decking or similar, then secure with a couple of spots of silicone sealant.
 - Push the unit into the hole, and adjust the cable so it does not get snagged.
 - Power-on. Your light is now ready for use.

