



Technical Data

13 Amp Double Pole Socket Outlets

Brief product description:

The screwless slim line design in a range of finishes will blend with any décor - suitable for domestic or commercial installations.

Features:

- Fixed integrated plastic gasket to protect metal edges from moisture
- Under 5mm thick
- Flat profile with rounded edges
- Available in 4 metal finishes
- Secure easy "Clip on, Clip off frontplate design
- Chrome range has choice of 2 insert colours
- Colour coded terminals with backed out captive screws for easy installation
- 2 Earth terminals

Product Images

Black Nickel



FBN21B



FBN22B

Brushed Steel



FBS21G




FBS22G

Polished Brass



FPB21B



FPB22B

Polished Chrome



FPC21G



FPC22G



FPC21W




FPC22W

13 Amp Double Pole Socket Outlets

Technical Specifications

Standard(s)	BS 1363 Part 2
Rating	13 Amp 250V~
Switch type	Double pole
Contact Gap	3.0mm minimum
Terminal Capacity	3 x 2.5mm ² 3 x 4mm ² 2 x 6.0mm ²
RoHS Directive	No
WEEE Directive	No
Mounting Box Depth(Min)	25mm
Fixing Centres	60.3mm (Fxx21x products) 120.6mm (Fxx22x products)
Size	87.4mm x 87.4mm x 31mm (Fxx21x products) 147.9mm x 87.4mm x 31mm (Fxx22x products)

Line Diagrams

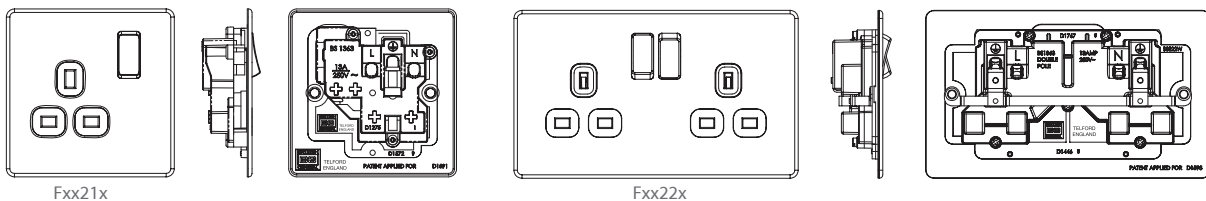

Weights & Dimensions

Cat No.	Description	Pack Quantity			Dimension (W x L x H) cm			Weight (g)			CMB (m ³)
		Each	Inner Box	Outer Box	Product	Inner Box	Outer Box	Each	Inner Box	Outer Box	Outer Box
Fxx21x	13A 1G DP, SW SKT	1	10	100	3.3 x 9 x 9.2	20 x 18 x 9.8	41.5 x 52.5 x 19				
Fxx22x	13A 2G DP, SW SKT	1	5	50	3.3 x 9 x 15.2	16 x 18 x 9.8	33.5 x 52.5 x 19				

Packaging Information

Cat No.	Description	Barcode			Cat No.	Description	Barcode		
		Individual	Inner Box	Outer Box			Individual	Inner Box	Outer Box
FBS21G	13A 1G DP, SW SKT	5050765006200	/	/	FBS22G	13A 2G DP, SW SKT	5050765006224	/	/
FPC21W	13A 1G DP, SW SKT	5050765005289	/	/	FPC22W	13A 2G DP, SW SKT	5050765005302	/	/
FPC21G	13A 1G DP, SW SKT	5050765005272	/	/	FPC22G	13A 2G DP, SW SKT	5050765005296	/	/
FPB21B	13A 1G DP, SW SKT	5050765008587	/	/	FPB22B	13A 2G DP, SW SKT	5050765008594	/	/
FBN21B	13A 1G DP, SW SKT	5050765006750	/	/	FBN22B	13A 2G DP, SW SKT	5050765006767	/	/

13 Amp Double Pole Socket Outlets

Installation Information

Safety Warning

Before use please read carefully and use in accordance with these safety wiring instructions.

Before commencing any electrical work ensure the supply **is switched off at the mains**. Either by switching off the consumer unit or by removing the appropriate fuse.

Wiring should be in accordance with the latest edition of the IEE regulations (BS 7671).

Wire Identification – Twin & Earth Cable

EARTH = Green/Yellow Sleaving

NEUTRAL = Black (pre Apr 04) / Blue (after Apr 04)

LIVE = Red (pre Apr 04) / Brown (after Apr 04)



Technical Helpline: 0845 194 7584
If in doubt consult a competent electrician.

The ends of the individual conductors should have the insulation removed by approx. 12mm. Any bare earth conductors should be sleeved to within 12mm of the ends. (These details are for general information only and conductor lengths may need to be trimmed in certain installations).

General Installation Instructions

- 1) If using the new product to replace an old one, note the cable connections and wire up new product in the same way as the old one, with Earthing as stated in these instructions.
- 2) Ensure the mounting box (metal or patress) for either flush or surface mounting is the appropriate size for the product.
- 3) Route the cable through the most suitable entry point of the mounting box. If a metal box is used, a protective cable grommet should be used.
- 4) Cables should be prepared so a sufficient conductor length reaches the terminals. Strip the ends of the individual conductors so that an adequate length enters the terminals.
- 5) Carefully arrange the wiring to lie along the edges of the product or box, keeping the central area clear.
- 6) To assist with the correct installation please consult the appropriate wiring diagram on this leaflet.
- 7) When connecting the new accessory ensure that only the bare end of the wire enters the terminal, and no bare wires are visible.

Always tighten the terminal screws securely, but do not overtighten.

An earth connection should always be made between the mounting box earth terminal, and the accessory earth terminal, where fitted. If this earth wire is bare, it is essential that it is sheathed with a length of green/yellow sleeving.

8) Carefully position the accessory into the wall box, ensuring that no wires are trapped between the plate and the wall. Do not overtighten the screws. (Fit screw covers + clip-on)

9) Once work has been completed correctly, replace the fuse for the circuit, switch the power back on, and test.

The product is now ready for use.

* Note - If your installation uses a four lug metal mounting box, remove the top and bottom lugs or bend fully back.

Decorative Front Plate Fixing

Fixing method varies depending on which product range is supplied. Always ensure wall surface is reasonably flat and smooth, with no bumps or projections.

Metal Front plates WITH screw fixing holes. These products comprise main unit with integral front plate and rear gasket. Fix unit to back box using two fixing screws supplied.

Front plates WITHOUT screw fixing holes. These products comprise main unit with integral gasket, and front plate as separate item. Fix unit to back box using two fixing screws supplied.

Clip front plate onto main assembly, ensuring screwdriver notch is located bottom right hand corner. To remove plate, place medium size flat bladed screwdriver in notch and lever off against gasket.

For all Decorative Plates - It is essential the gasket is fitted between product and wall, to reduce possibility of discolouration of front plate edges due to natural moisture in some wall finishes.


To keep the finish of this product, wipe over with soft cloth periodically.

All Decorative products MUST have an earth connection between the front-plate and back box

1 Gang 13 Amp Switched Socket

This socket is fitted with with two linked terminals to provide a dual earth facility. This is for use in "clean earth" installations where additional earth capacity is required to comply with Regulation 607 of BS7671 IEE Wiring Regulations.

Connect the cables as shown in the diagram.

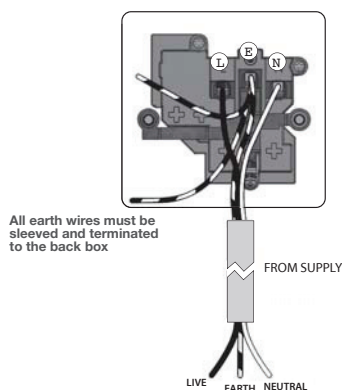

2 Gang 13 Amp Switched Socket

This socket is fitted with with two linked terminals to provide a dual earth facility.

This is for use in "clean earth" installations where additional earth capacity is required to comply with Regulation 607 of BS7671 IEE Wiring Regulations.

Connect the cables as shown in the diagram.

