

wall mounting socket outlet




Product description	
BALS-Prd.-Nr	11311
EAN	4024941113113
Product group	Wall mounting socket outlet
Current	32A
Number of poles	3p
Arrangement of the phases	2P+PE
Earth 'clock' position	4 h
Voltage	100 up to 130V
Frequency	50 and 60Hz

Product description	
Protection degree	IP67
Colour code	yellow
Colour of appliance	Hinged lid yellow, Housing cover grey, Housing bottom grey, Collar grey
Connection design	screw terminal
Maximum conductor size	10,0 qmm
Cable entry	1x Top entry M25 2x Bottom entry M25
Dimension of enclosure	126x83 mm (HxW)
Material of enclosure	Polyamide
Contacts	The contact carrier is made of polyamide, The contacts are brass

Additional technical information	
	The cable entry is one at top open and two at bottom closed
	Lower part of housing rotatable by 180°
	4 cut out fixing holes in the lower part of housing

Logistics data	
Weight/pcs	0.393 kg / piece
Packaging	bag
Content amount	1 ST
EAN	4024941113113
Length	410 mm

Logistics data	
Width	285 mm
Weight	0.393 kg
Packaging	carton
Content amount	10 ST
EAN	4024941842495
Length	335 mm
Width	283 mm
Height	268 mm
Weight	4.305 kg
Volume	21,937.5 ccm

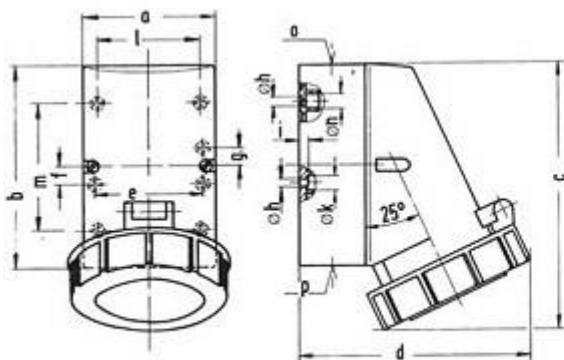

Amperes Poles	16			32		
	3	4	5	3	4	5
a	64	75	75	83	83	83
b	87	100	100	126	126	126
c	115	130	130	160	160	160
d	103	110	115	129	129	135
e	51	59	59	68	68	68
f	20	11	11	11	11	11
g	20	-	-	-	-	-
øh	4.1	5.1	5.1	5.5	5.5	5.5
i	4.5	4.5	4.5	6.5	6.5	6.5
øk	8	10	10	12	12	12
l	-	-	-	65	65	65
m	-	-	-	80	80	80
ø n	-	-	-	10	10	10
o	M20	M20	M20	M25	M25	M25
p	M20	M20	M20	2xM25	2xM25	2xM25
Conductor mm ² min	1.5	1.5	1.5	2.5	2.5	2.5
Conductor mm ² max	4	4	4	10	10	10