

# Bulkhead 2-in-1 MW Sensor

114573


Thank you for purchasing this product. Please read the instruction carefully before use to ensure safe and satisfactory operation of this product. Please retain these instruction for future reference.

<b>Max Load</b>	20W (LED)
<b>Operating Temp</b>	-20°C – +40°C
<b>Connection Type</b>	Quick Connector
<b>Sensor Type</b>	Microwave
<b>Mounting Height</b>	6m Max.
<b>Control Type</b>	ON/OFF/STEP-DIM



**Dimensions:**

Description	L (mm)	W (mm)	H (mm)	Weight
Plug & Play MW Sensor (For Bulkheads)	50	27	23	30g

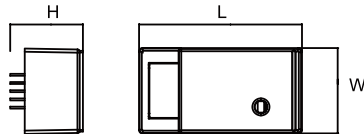

**WARNING: Risk of electric shock!**

**Isolate the mains power before proceeding.**

- Turn off the mains power before performing inspections, installation, or removal
- Verify that the supply voltage is correct by comparing it with the luminaire label information
- It is the installers responsibility to ensure installation is suitable for the total load of the product(s). The supply cable, fuses/circuit breakers must be correctly rated for the electrical load and considering for any transient inrush currents that may occur.
- Do not perform insulation strength or resistance tests on installed product(s) connected

**Installation Procedure:**

1.

2.

3.

**STANDARD**

- L - LIVE (SL) = Brown
- EARTH = Green/Yellow
- N - NEUTRAL = Blue

4.

**EMERGENCY**

- PL - PERMANENT LIVE = Black
- L - LIVE (SL) = Brown
- EARTH = Green/Yellow
- N - NEUTRAL = Blue

5.

6.

Daylight Sensor		Sensitivity			Times & Standby						
1	2	Lux Level	3	4	Detection area	5	6	7	Hold Time	Standby Time	Standby Dim-Level
-	-	Disable	-	-	100%	-	-	-	5s	0	0%
ON	-	50Lux	ON	-	75%	-	ON	ON	1min	0	0%
-	ON	25Lux	-	ON	50%	ON	ON	ON	10min	0	0%
ON	ON	2Lux	ON	ON	25%	-	-	ON	30s	1min	20%
						ON	-	-	30s	10min	20%
						ON	-	ON	1min	5min	20%
						-	ON	-	3min	10min	20%
						ON	ON	-	3min	Permanent	20%

Default Setting: Daylight sensor disabled; Sensitivity 100%; Hold time 5s; Standby 0%

