

Plug - with screw terminals one piece housing




Product description	
BALS-Prd.-Nr	21013-TLS
EAN	4024941192767
product category (PG)	TLS plug with Multi-Grip cable gland
current (A)	32A
number of poles (P99)	3p
number of poles (P)	2P+PE
position of earth contact (H)	6 h
voltage (V)	200 up to 250V
frequency (HZ)	50 and 60Hz

Product description	
protection degree (SA)	IP44
colour code 1 (KF1)	blue RAL 5015
Colour of appliance	Enclosure blue RAL 5015, Cable gland grey RAL 7035
connection design (AT)	with screw terminal
maximum conductor size (LQ)	6,0 qmm
cable entry (KE)	Cable gland
Height	167mm
Width	71mm
Depth	81mm
material of enclosure (GM)	Polyamide
contact	The contact carrier is made of polyamide, The contacts are brass

Additional technical information	
	one piece housing, Multi-Grip cable gland with gasket and integrated strain relief, For cable diameter from 11 up to max. 23,5 mm

Logistics data	
Weight/pcs	0.214 kg / Piece
Packaging	Bag
Content amount	1 ST
EAN	4024941192767

Logistics data	
Length	81 mm
Width	71 mm
Height	167 mm
Weight	0.215 kg
Volume	960.417 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941841580
Length	245 mm
Width	177 mm
Height	185 mm
Weight	2.273 kg
Volume	7,140 ccm

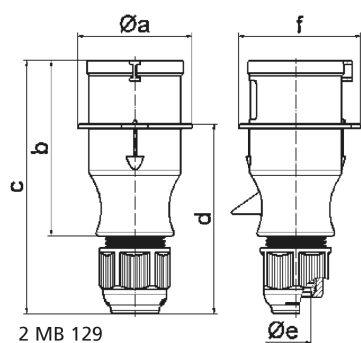

Ampere	16	16	16	32	32	32	
Polzahl	3	4	5	3	4	5	
a ø	54,0	60,0	66,0	71,0	71,0	80,0	
b	94,5	98,0	101,0	115,0	115,0	119,0	
c	138,0	142,0	145,0	170,0	170,0	174,0	
d	101,5	105,5	108,5	124,0	124,0	128,0	
e ø	18,0	18,0	18,0	23,0	23,0	23,0	
f	56,6	64,0	71,0	76,0	76,0	85,0	
Leiter mm² min	1	1	1	2,5	2,5	2,5	
Leiter mm² max	2,5	2,5	2,5	6	6	6	