

plug - with screwless terminals, for harsh applications

Product description

| | |
|------------------------|--|
| Order number | 21240 |
| EAN/pcs | 4024941212403 |
| Product Group | Quick-Connect TE-Plus plug with Multi-Grip cable gland |
| Amperage | 32A |
| Poles | 3p (2P+PE) |
| Earth 'Clock' Position | 6 h |
| Voltage | 200 up to 250V |
| Frequency | 50 and 60Hz |
| Protection | IP67 |
| Color code | blue RAL 5015 |
| Connection Design | screwless spring-clamp technology as cage clamp |
| Max. conductor | 6,0 mm ² |




Further Information

| | |
|----------------------------------|--|
| Additional technical information | Multi-Grip cable gland with gasket, integrated cable clamp and additional water evacuation openings For cable diameter from 11 up to max. 23,5 mm |
|----------------------------------|--|

Material

| | |
|---------------------------|---|
| Material of Enclosure | Polyamide |
| Contact / Contact Carrier | contact carrier made of high temperature resistant material, contacts are brass nickel plated |
| Weight/pcs | 0.285 kg |

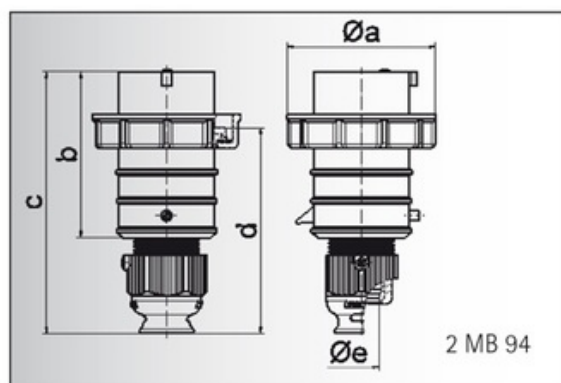

| | | | | | | |
|----------------------------|-------|-------|-------|-------|-------|-------|
| Ampere | 16 | 16 | 16 | 32 | 32 | 32 |
| Polzahl | 3 | 4 | 5 | 3 | 4 | 5 |
| a Ø | 70,0 | 78,0 | 86,0 | 94,0 | 94,0 | 101,0 |
| b | 95,0 | 95,0 | 97,0 | 118,0 | 118,0 | 117,0 |
| c | 145,0 | 145,0 | 152,0 | 178,0 | 178,0 | 181,0 |
| d | 111,0 | 111,0 | 119,0 | 136,0 | 136,0 | 138,5 |
| e Ø | 18,0 | 18,0 | 21,0 | 23,0 | 23,0 | 27,0 |
| Leiter mm ² min | 1 | 1 | 1 | 2,5 | 2,5 | 2,5 |
| Leiter mm ² max | 2,5 | 2,5 | 2,5 | 6 | 6 | 6 |