

Ultra Endure 25-60W LED CCT Anti-Ligature 5ft Black Batten Cornice

Part Code: 70190

The Ultra Endure LED Batten is CCT and anti-ligature, available in both Black and White. Also available in emergency and with Dali Dimming.

- Suitable for challenging & tough environments
- Perfect for secure hospitals, tunnels & prisons
- IK10



7 Year
Guarantee




IP65
Rated



220/240
Volts



Wattage
Switchable

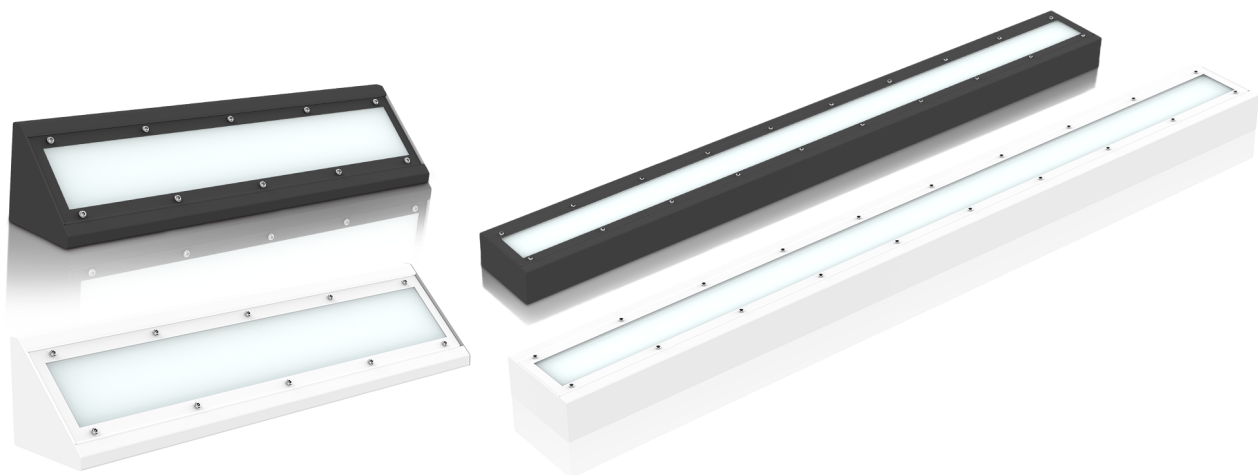

Wattage Switchable CCT Vandal Resistant Batten



Product Category Fittings / Fittings

Application Anti-Ligature Batten

Product Warranty 7 Years

EAN 5013588701905

Commodity Code 9405423100

Country of Origin CN

Technical Specification

Watts (W)	25/33/41/55/60
Equivalent Watts (W)	40/54/66/90
Volts (V)	220/240
Colour Temp (K)	3000/4000/6000
Lumens (lm)	25W = 3108 (3000K) / 3456 (4000K) / 3261 (6000K) - 35W = 4102 (3000K) / 4562 (4000K) / 4304 (6000K) - 45W = 5097 (3000K) / 5668 (4000K) / 5348 (6000K) - 55W = 6837 (3000K) / 7604 (4000K) / 7174 (6000K) - 60W = 7458 (3000K) / 8295 (4000K) / 7826 (6000K)
Lumens per Watt (lm/W)	115-119
Candelas (cd)	1130-2756
CRI (Ra)	80
Frequency (Hz)	50/60
LED Drive Current	188-450mA
Energy Consumption (kWh/1000h)	60
Life Hours	100000
Switching Cycles	300000
Impact Protection	IK10
IP Rating	IP65

Packaging Information

Height (mm)	120
Width (mm)	167
Length (mm)	1500
Individual Product Weight (kg)	7.75
Single Carton Height (mm)	212
Single Carton Width (mm)	148
Single Carton Depth (mm)	1596
Single Carton Weight (kg)	8.05
Individual Volume	0.050076096
Outer Box Qty	2
Outer Carton Barcode	7019000000002
Outer Box Height (mm)	300
Outer Box Width (mm)	227
Outer Box Depth (mm)	1610
Outer Box Weight (kg)	15
Outer Box Volume	0.109641

Wattage Switchable CCT Vandal Resistant Batten

Additional Information	
Beam Angle	100°