

<p>0.75 - 2.5 mm² "s" ① 1.5 - 2.5 mm² "st" 400 V/4 kV/2 ② I_N 24 A 12 mm / 0.47 in ③</p>	<p>AWG 18 - 12 "s" AWG 16 - 12 "st" 600 V, 20 A[Ⓐ] 600 V, 20 A[Ⓑ]</p>	<p>0.75 - 2.5 mm² "s" 1.5 - 2.5 mm² "st" 400 V/4 kV/2 ② I_N 24 A 12 mm / 0.47 in ③</p>	<p>AWG 18 - 12 "s" AWG 16 - 12 "st" 600 V, 20 A[Ⓐ] 600 V, 20 A[Ⓑ]</p>	<p>2.5 - 6 mm² "s+st" 400 V/4 kV/2 ② I_N 41 A 12 - 13 mm / 0.49 in ③</p>	<p>AWG 14 - 10 "s+st" 600 V, 20 A[Ⓐ] 600 V, 30 A[Ⓑ]</p>
--	--	--	--	--	---




Item No.	Pack. Unit	Color	Item No.	Pack. Unit	Item No.	Pack. Unit
PUSH WIRE® connector for junction boxes, 8-conductor connector, transparent housing, dark gray cover		PUSH WIRE® connector for junction boxes, 4-conductor connector, continuous service temperature 150°C		PUSH WIRE® connector for junction boxes, 3-conductor connector, transparent housing, red cover		
773-108	500 (10x50)	● black	773-514	1000 (10x100)	773-173	500 (10x50)

773 Series Accessories


Syringe,




contents: 20 ml "Alu-Plus" contact paste
249-130 20 (4x5)

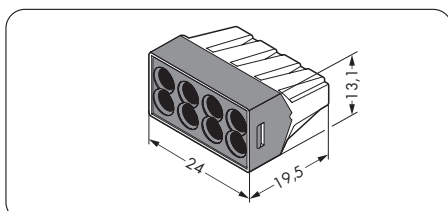

Dimensions in mm

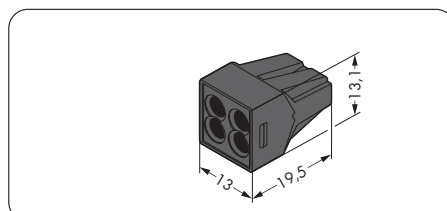

Dimensions in mm

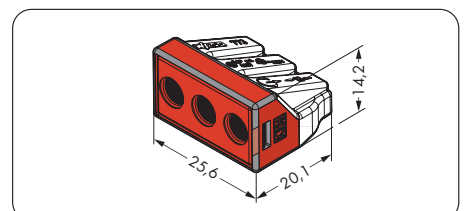

Dimensions in mm