

Object :  
Installation :  
Project number :  
Date :



# 1 Luminaire data

## 1.1 ANSELL, FLOODLIGHTING - Eden LED FI... (AEDELED10/WW)

### 1.1.1 Data sheet

Manufacturer: ANSELL



**AEDELED10/WW Rectangular projector FLOODLIGHTING - Eden LED Floodlight**  
AEDELED10/WW  
Floodlighting  
Eden LED Floodlight  
Supplied c/w Integral Driver

- Compact and economic LED Floodlight
  - 10W ideal for halogen replacement
  - Bracket design allows installation without removing mounting bracket
  - PIR versions complete with manual override facility
  - Pre-wired with 1 metre of rubber insulated cable for ease of installation
  - Cool white and warm white options available
  - LED lifespan L90 36,000 hours
  - Non-dimmable
- 
- Suitable for both internal and external use
  - 2 Year Product Warranty
  - IP65



#### Luminaire data

Absolute Photometry  
Luminaire efficacy : 89.4 lm/W  
Classification : A50 ↓100.0% ↑0.0%  
CIE Flux Codes : 56 92 100 100 100  
UGR 4H 8H : 25.9 / 27.5  
Control gear : Electronic ballast  
Power : 10 W  
Luminous flux : 894 lm

#### Equipped with

Quantity : 1  
Designation : LED single 830  
Colour : 830/3000K  
Socket : --  
Colour reproduction : 1B/80...89

Dimensions : 114 mm x 82 mm x 30 mm

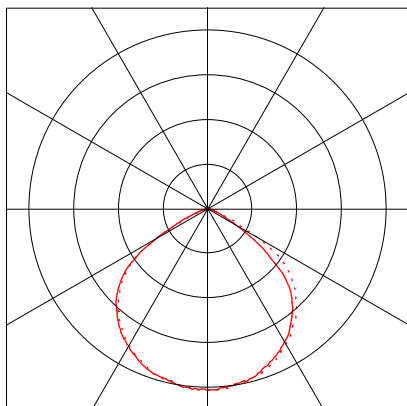


Object :  
 Installation :  
 Project number :  
 Date :



**1.1 ANSELL, FLOODLIGHTING - Eden LED FI... (AEDELED10/WW)**

**1.1.2 LDC**

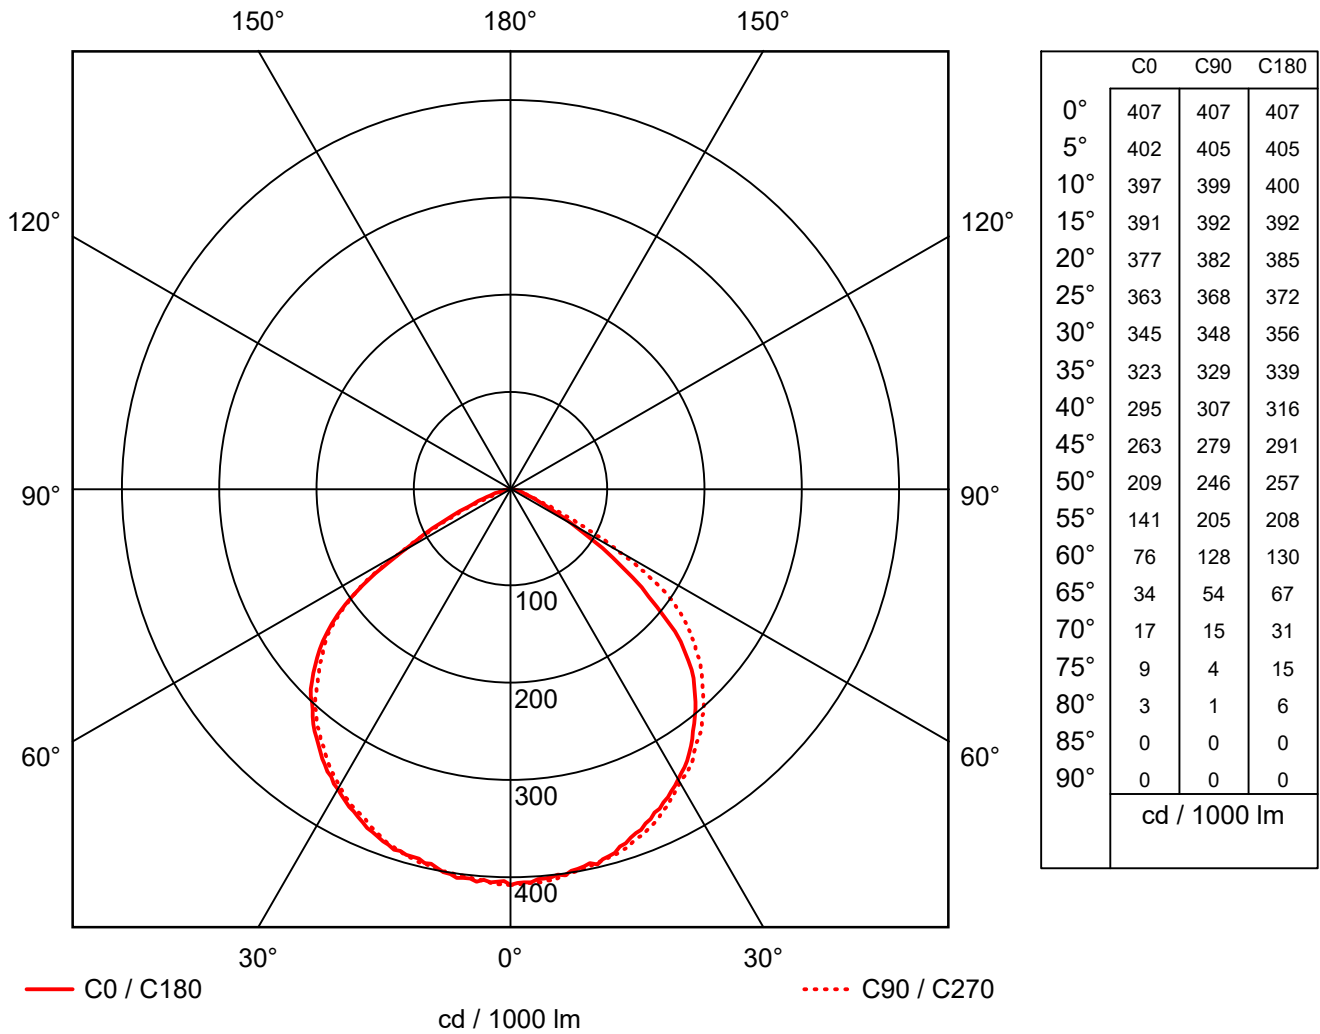

Manufacturer : ANSELL  
 Order number : AEDELED10/WW  
 Luminaire name : FLOODLIGHTING - Eden LED Floodlight  
 Equipment : 1 x LED single 830 10 W / 894 lm  
 Dimensions : L 114 mm x W 82 mm x H 30 mm  
 File name : rlx\_20200114144811.Idt  
 Luminaire efficacy : 89.4 lm/W (A50)  
 Light distribution :  
 Beam Angle : 50.3° C0  
 55.1° C90  
 55.3° C180  
 55.2° C270