

Object :
Installation :
Project number :
Date :



1 Luminaire data

1.1 ANSELL, FLOODLIGHTING - Eden LED FI... (AEDELED20/CW)

1.1.1 Data sheet

Manufacturer: ANSELL



AEDELED20/CW Rectangular projector FLOODLIGHTING - Eden LED Floodlight

AEDELED20/CW
Floodlighting
Eden LED Floodlight
Supplied c/w Integral Driver

- Compact and economic LED Floodlight
 - 20W exceeds performance of 20W HQI
 - Bracket design allows installation without removing mounting bracket
 - PIR versions complete with manual override facility
 - Pre-wired with 1 metre of rubber insulated cable for ease of installation
 - Cool white and warm white options available
 - LED lifespan L90 36,000 hours
 - Non-dimmable
-
- Suitable for both internal and external use
 - 2 Year Product Warranty
 - IP65



Luminaire data

Absolute Photometry
Luminaire efficacy : 91.7 lm/W
Classification : A50 ↓100.0% ↑0.0%
CIE Flux Codes : 54 89 100 100 100
UGR 4H 8H : 28.9 / 29.3
Control gear : Electronic ballast
Power : 20 W
Luminous flux : 1834 lm

Equipped with

Quantity : 1
Designation : LED single 840
Colour : 840/4000K
Socket : --
Colour reproduction : 1B/80...89

Dimensions : 138 mm x 100 mm x 30 mm

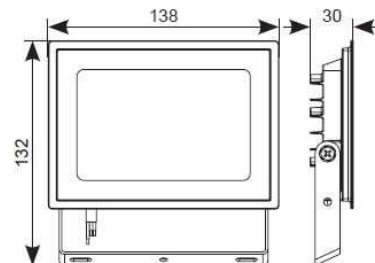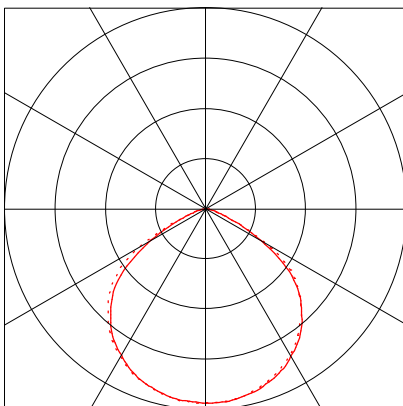


Object :
 Installation :
 Project number :
 Date :



1.1 ANSELL, FLOODLIGHTING - Eden LED FI... (AEDELED20/CW)

1.1.2 LDC

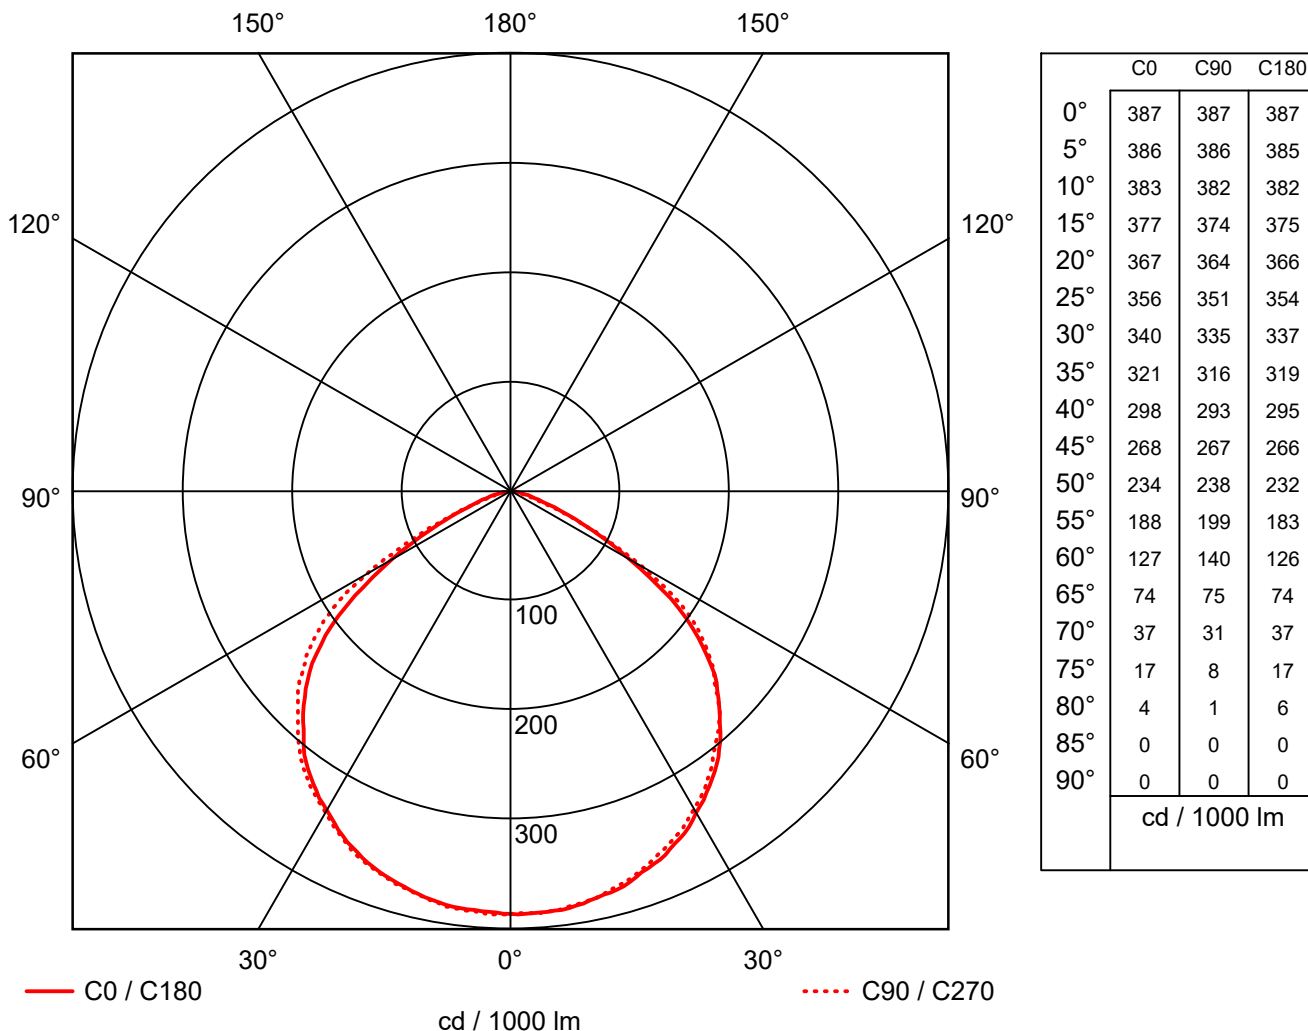

Manufacturer : ANSELL
 Order number : AEDELED20/CW
 Luminaire name : FLOODLIGHTING - Eden LED Floodlight
 Equipment : 1 x LED single 840 20 W / 1834 lm
 Dimensions : L 138 mm x W 100 mm x H 30 mm
 File name : rlx_20200114144812.Idt
 Luminaire efficacy : 91.7 lm/W (A50)
 Light distribution :
 Beam Angle : 54.5° C0
 55.6° C90
 54.1° C180
 56.6° C270