

Object :
Installation :
Project number :
Date :



1 Luminaire data

1.1 ANSELL, FLOODLIGHTING - Eden LED FI... (AEDELED50/WW)

1.1.1 Data sheet

Manufacturer: ANSELL



AEDELED50/WW Rectangular projector FLOODLIGHTING - Eden LED Floodlight
AEDELED50/WW
Floodlighting
Eden LED Floodlight
Supplied c/w Integral Driver

- Compact and economic LED Floodlight
 - 50W comparable light output of 70W HQI
 - Bracket design allows installation without removing mounting bracket
 - PIR versions complete with manual override facility
 - Pre-wired with 1 metre of rubber insulated cable for ease of installation
 - Cool white and warm white options available
 - LED lifespan L90 36,000 hours
 - Non-dimmable
-
- Suitable for both internal and external use
 - 2 Year Product Warranty
 - IP65



Luminaire data

Absolute Photometry
Luminaire efficacy : 78.34 lm/W
Classification : A40 ↓100.0% ↑0.0%
CIE Flux Codes : 51 86 99 100 100
UGR 4H 8H : 29.8 / 30.2
Control gear : Electronic ballast
Power : 50 W
Luminous flux : 3917 lm

Equipped with

Quantity : 1
Designation : LED single 830
Colour : 830/3000K
Socket : --
Colour reproduction : 1B/80...89

Dimensions : 196 mm x 143 mm x 31 mm

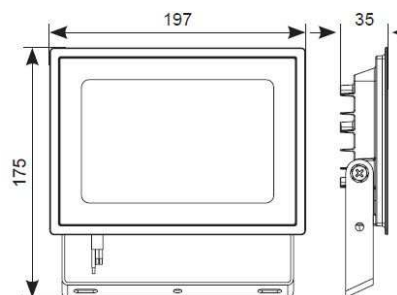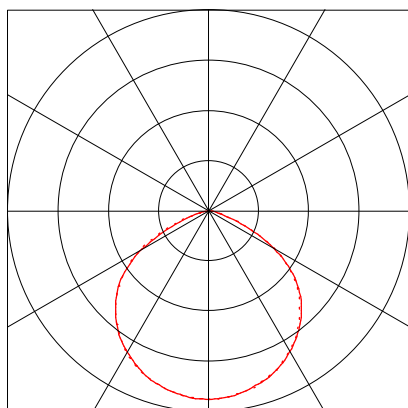


Object :
 Installation :
 Project number :
 Date :



1.1 ANSELL, FLOODLIGHTING - Eden LED FI... (AEDELED50/WW)

1.1.2 LDC

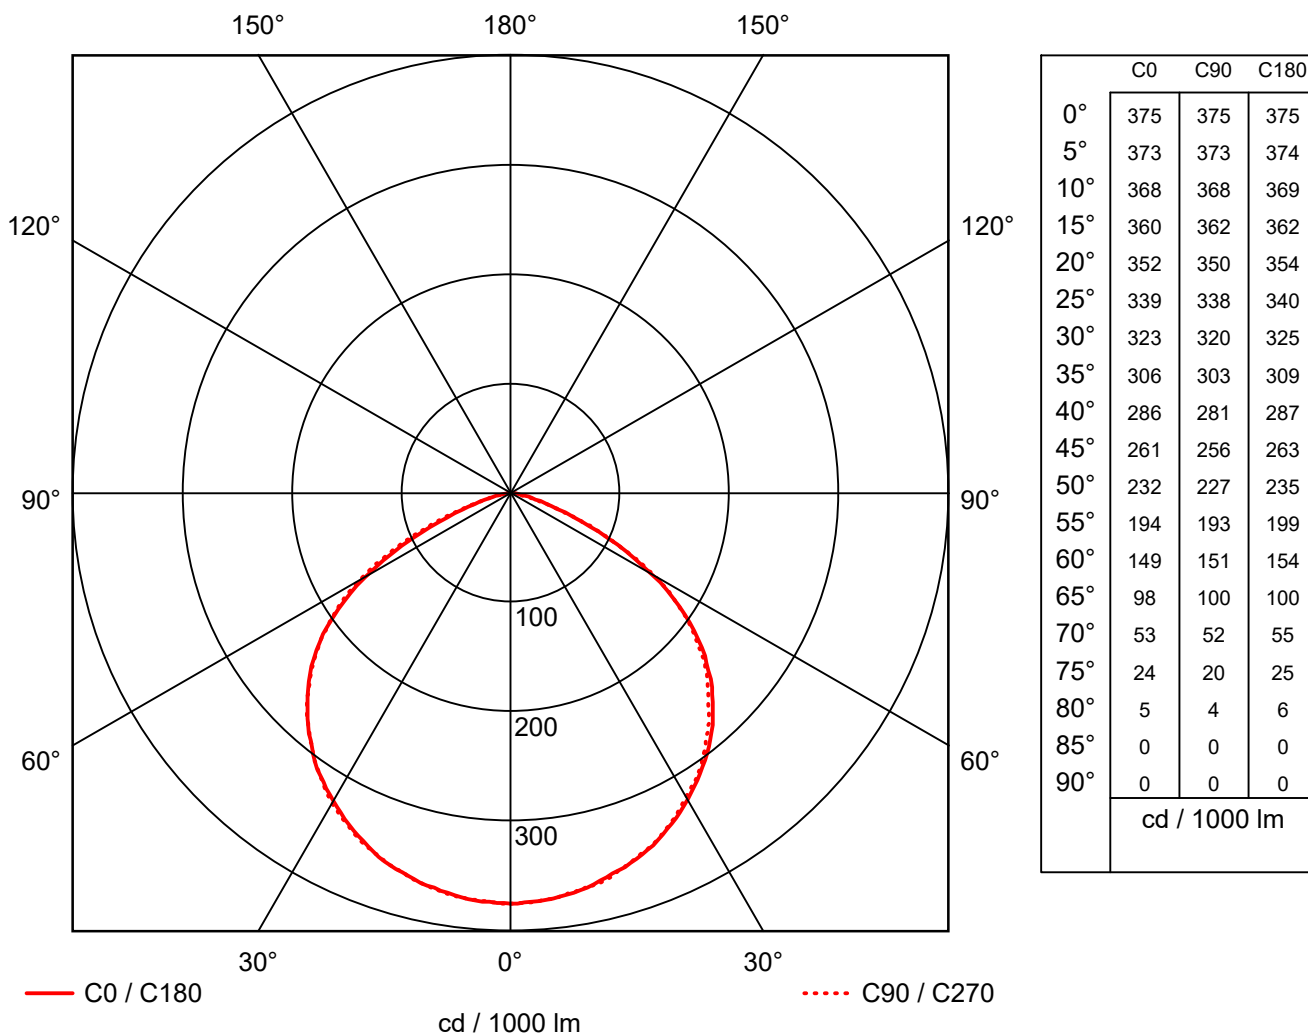

Manufacturer : ANSELL
 Order number : AEDELED50/WW
 Luminaire name : FLOODLIGHTING - Eden LED Floodlight
 Equipment : 1 x LED single 830 50 W / 3917 lm
 Dimensions : L 196 mm x W 143 mm x H 31 mm
 File name : rlx_20200114144819.Idt
 Luminaire efficacy : 78.34 lm/W (A40)
 Light distribution :
 Beam Angle : 55.8° C0
 55.7° C90
 56.3° C180
 56.7° C270