




## AMATBLED

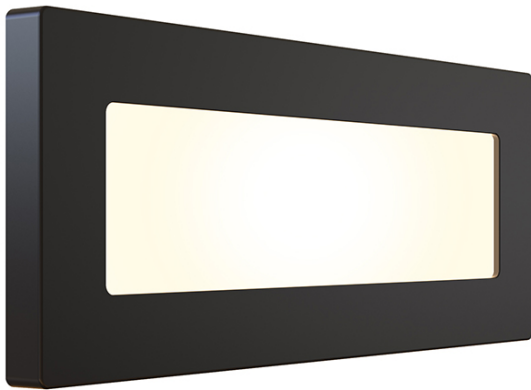

### Features

- Universal polycarbonate LED bricklight
- Unique adjustable feet allows for installation into multiple brick apertures
- Polycarbonate construction ideal for coastal applications
- Push fit loop-in loop-out terminals for ease of installation
- Pre-wired with 600mm of rubber insulated cable
- Supplied c/w installation housing for additional protection and ease of installation
- CCT selectable between 3000K and 4000K
- Non-dimmable

## General Information

Lamp Type	LED
IP Rating	IP65
Class Protection	1
Internal / External	External
Surface / Recessed / Suspended	Recessed
Warranty (Years)	3
CE Mark	Yes
Width (mm)	261
Height (mm)	106
Depth (mm)	72

## Technical Information

Wattage	2W
Lumens Delivered	101lm (Cool White), 85lm (Warm White)
Lm/W	51lm (Cool White), 43lm (Warm White)
Beam Angle	105
CRI	Ra 80
CCT	3000/4000K
Input	230V
Hertz	50Hz
Operating Temp	-10°C to 40°C

## Technical Data - ETIM - Orientation luminaire (EC000481)

With light source	Yes
Suitable for number of lamps	1
Material housing	Plastic
Suitable for surface mounting	No
Nominal voltage	230-230 V
Control gear included	Yes
No dim function	Yes
Degree of protection (IP)	IP65
Protection class	I
Max. system power	2 W
Rated luminous flux acc. IEC 62722-2-1	101 lm
Colour of light	White
Colour temperature	3000-4000 K
Colour rendering index CRI	80-89
Width	261 mm
Height/depth	72 mm
Length	106 mm

Datasheet generated from <https://onetimepim.com> last updated Monday, September 6, 2021 12:41:03 PM

