


Smart Receivers

Control your lights and appliances from wherever you are.



Easily making your switch outlet smart.

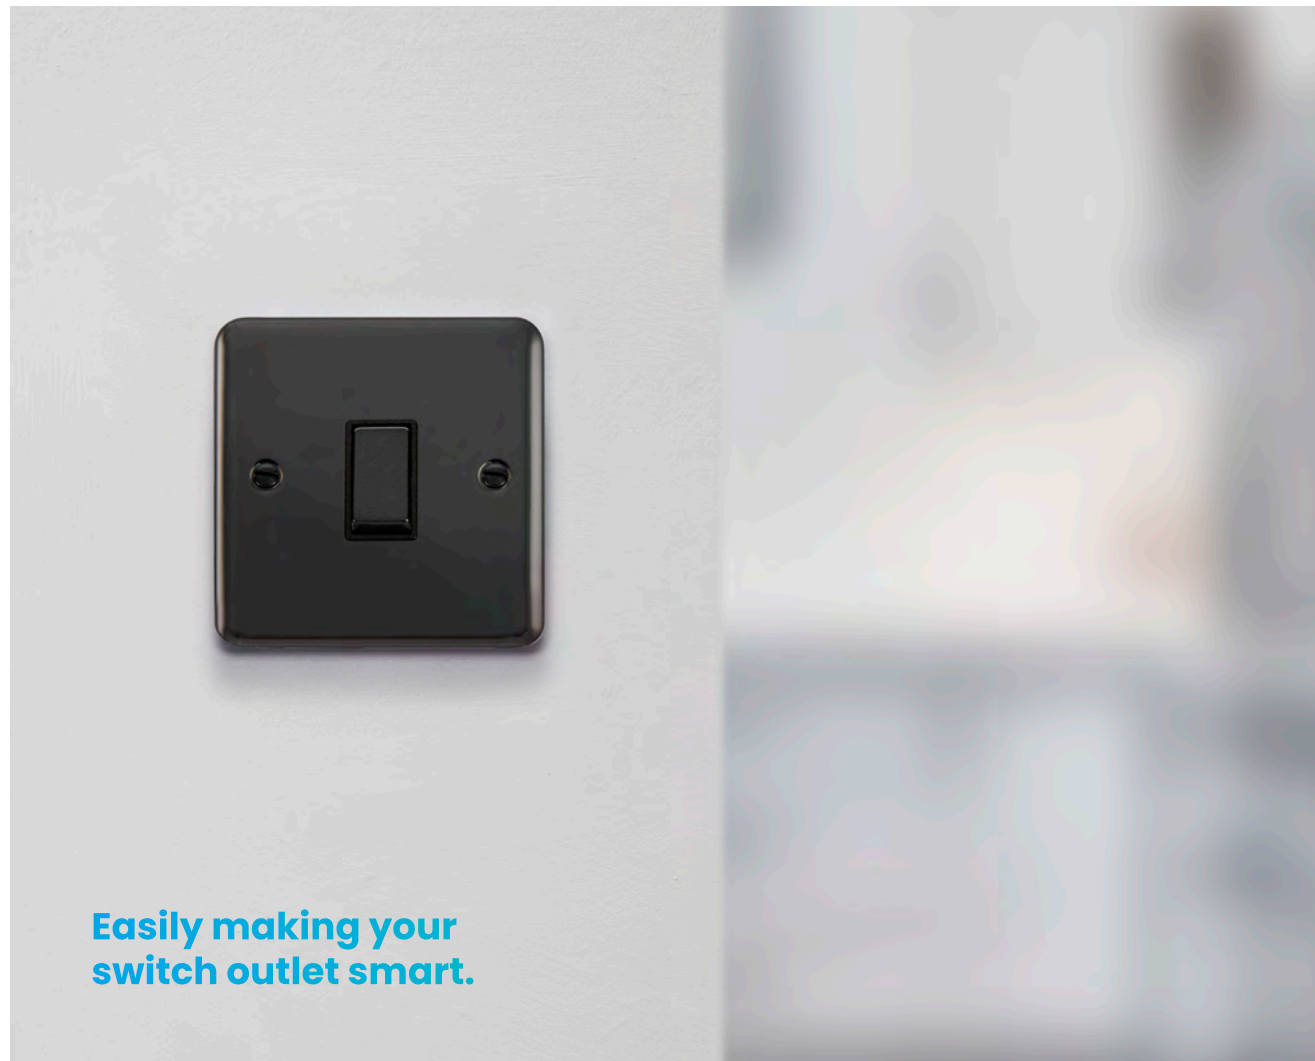

Wireless Zigbee smart control

No neutral connection required
(Except CSP043)

Up to 100 metre detection range
(open air)

VOLTAGE (V~) & FREQUENCY (Hz)
220-240

WIRELESS RANGE
Up To 100 metres (Open Air)

FINISH
White


MINIMUM BACK BOX DEPTH (MM)
35 (47 Flat Plate)

DIMENSIONS (MM)
46 (W) x 46 (H) x 18 (D)

PRODUCT WARRANTY (YEARS)
2

CONNECTIVITY

- WIFI Secure Connection
 Zigbee Wireless Connection



*Smart Receivers require the
Click Smart+ Hub (Sold separately)

Switching Receivers

(Utilises standard on/off switches)

CSP041

100W 1 Gang Smart Switching Receiver



LOAD RATING (W)
100 LED

CSP042

2 x 100W 2 Gang Smart Switching Receiver



LOAD RATING (W)
100 (x2) LED

CSP043

10A 1 Gang Smart Switching Receiver



LOAD RATING (W)
250 (2300) LED (Resistive)

Dimming Receivers

(Utilises retractive switches)

CSP051

150W 1 Gang Smart Dimming Receiver



LOAD RATING (W)
150 LED

CSP052

2 x 100W 2 Gang Smart Dimming Receiver



LOAD RATING (W)
100 (x2) LED