



CT103C

CT203C

CT101C

CT102C

CT202C


**3 Pole Flow™ Connectors**

- CT101C** 250V 20A 3 Pole Flow™ Connector
- CT102C** 250V 20A 3 Pole Flow™ Connector Screw-Down Cord Grip
- CT103C** 250V 20A 3 Pole Flow™ Connector Fast-Fit Cord Grip
- CT103M** 250V 20A 3 Pole Flow™ Fast-Fit Cord Grip (Male Connector Only)

**4 Pole Flow™ Connectors**

- CT202C** 250V 20A 4 Pole Flow™ Connector Screw-Down Cord Grip
- CT203C** 250V 20A 4 Pole Flow™ Connector Fast-Fit Cord Grip
- CT203M** 250V 20A 4 Pole Flow™ Fast-Fit Cord Grip (Male Connector Only)

Standards: 102C, 103C, 202C, 203C: BS EN 61535 CT101C: BS 5733  
 Cable Size: 4 x 1mm<sup>2</sup> Flex / 3 x 2.5mm<sup>2</sup> Current Rating: 20A  
 Dimensions: CT103C: 135mm x 50mm x 25mm CT203C: 135mm x 49mm x 23mm CT101C: 105mm x 40mm x 23mm  
 CT102C: 105mm x 50mm x 23mm CT202C: 105mm x 50mm x 23mm

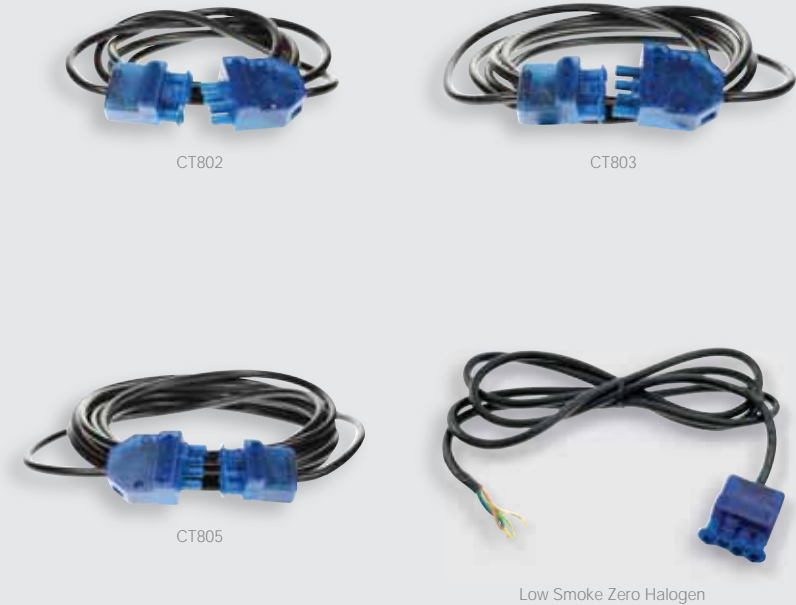

CT802

CT803

CT805

Low Smoke Zero Halogen

**Flow™ Extension Cables (PVC)**

- CT802** 6A 4 Pole Flow™ Extension Cable - 2 Metre
- CT803** 6A 4 Pole Flow™ Extension Cable - 3 Metre
- CT805** 6A 4 Pole Flow™ Extension Cable - 5 Metre

**Flow™ Extension Cables (LSZH)**

- CT732** 6A 3 Pole 0.75mm LSZH To FE 2m
- CT733** 6A 3 Pole 0.75mm LSZH To FE 3m
- CT735** 6A 3 Pole 0.75mm LSZH To FE 5m
- CT742** 6A 4 Pole 0.75mm LSZH To FE 2m
- CT743** 6A 4 Pole 0.75mm LSZH To FE 3m
- CT745** 6A 4 Pole 0.75mm LSZH To FE 5m
- CT845** 20A 4 Pole 2.5mm Male To Female LSZH 5m

Standards: Connectors: BS 5733, BS EN 61535, EN 50525-2-11, EN 50525-3  
 Cable Size: 4 x 0.75mm<sup>2</sup> CT845: 4 x 2.5mm<sup>2</sup>  
 Dimensions: Will pass through a 55mm hole