
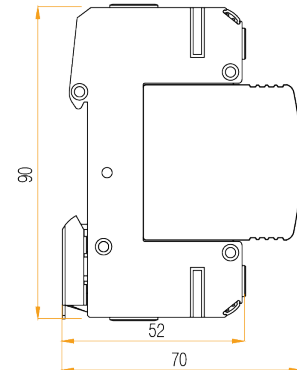


Product Code: CU2SPD275T

Description: 2 Pole 275Uc (V~) 40kA Type 2 SPD With Tails

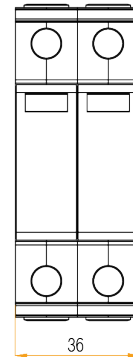

General Information

Overall Dimensions (mm)	36 (W) x 90 (H) x 70 (D)	
Finish	Light Grey (RAL 7035)	
Maximum Continuous Operating Voltage (V~) (Uc)	275	
SPD Type	Type 2	
Overcurrent Protection (A)	300	
Voltage Protection Level (Kv) (Up)	<1.6	
Nominal Discharge Current (kA) (In)	20 (L-N & N-PE)	
Maximum Discharge Current (kA) (Imax)	40 (L-N & N-PE)	
Response Time (ns) (tA)	<25	
Compatible Earthing Systems	TT / TN	
Visual Indicator Status (Green)	Normal Function	
Visual Indicator Status (Red)	Cartridge Replaceable For L&N (Product Ref.CU2SPDC275)	
Device Terminals	Screwed Lug & Pin	
SPD Terminal Capacity - L&N (mm ²)	2.5 - 35	SPD Terminal Torque (Nm) 2
SPD Terminal Capacity - PE (mm ²)	4 - 35	
Number Of Poles	2	
Ingress Protection	IP20	
Operational Temperature (°C)	-40 to +70	
Warranty (Years)	3	

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
 Suitable for wiring directly from the Switch Disconnecter 'Output'. The respective busbar may need to be shortened.
 6mm² tails supplied (live, neutral & earth)
 Additional overcurrent protection is not required.
 The SPD cartridges must be removed for insulation resistance testing.