

LittleJoint

- Equipped with cable glands to avoid accidental cable traction
- Complete with screw connectors
- Pre-filled with non-toxic, non-classified gel
- Very compact and ready to use
- Always re-enterable
- Halogen free & UV resistant

CEI EN 50393 (as applicable)

Gel: UL 94-HB

Operating temperature: 90°C

Installation temperature: -40°C / +50°C

For every type of use, even underground.

IP68: (6) Totally protected against dust and solid objects over 1 mm (tools, wires, and small wires).


(8) Protected from permanent immersion in water.

IP69K: (9K) Protected against close-range high pressure, high temperature spray downs.




IP68
OFFICIALLY
TESTED

IP69K
OFFICIALLY
TESTED

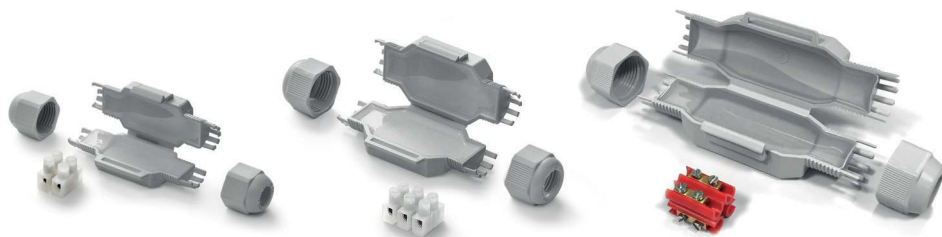

LittleJoint L



Product	Colour	Connector	Cable formation max (N° x mm²)	Ø cable min - max (mm)	Pieces/Pack	A x B x C (mm)
Barney	●		2 x 2,5	6 - 10	1 / Blister	75 x 28 x 19
Barney - N	●				1 / Blister	
Barney MP	●				10 / Multipack	
Fred	●		3 x 2,5	8 - 13	1 / Blister	80 x 36 x 23
Fred - N	●				1 / Blister	
Fred MP	●				10 / Multipack	
Fred/4	●		3 x 4	8 - 13	1 / Blister	80 x 36 x 23
Fred/4 - N	●				1 / Blister	
Dino	●		4 x 4	10 - 16	1 / Blister	125 x 43 x 35
Dino - N	●				1 / Blister	