

Floodlights



High efficacy of up to 130lm/W




First fix bracket for quick & easy installation



Ideal for coastal areas

Guarantee	5 years for standard & 3 years for PIR
Wattage	10W
IP rating	IP65
IK rating	IK07
Tiltable	180°
Rotatable	360°
Dimmable	No
Input	220-240V 50/60Hz
LED lifetime	50,000h L70 25,000h L70 (with PIR)
Connector	Flying lead
Ambient temperature	-40°C to 40°C
Electric class	1

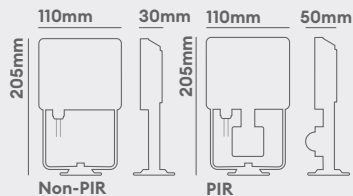

FL01

10W colour switchable floodlight suitable for 6.5m height



Product code	Finish	Type	Wattage	Colour	Beam	lm	lm/W	lx at 1m
FL01BPCS	Black	PIR sensor	10W	3000K	120°	1100	110	419
				4000K	120°	1150	115	502
				6500K	120°	1300	130	461
FL01BXCS	Black	Standard	10W	3000K	120°	1100	110	419
				4000K	120°	1150	115	502
				6500K	120°	1300	130	461
FL01WPCS	White RAL9016	PIR sensor	10W	3000K	120°	1100	110	419
				4000K	120°	1150	115	502
				6500K	120°	1300	130	461
FL01WXCS	White RAL9016	Standard	10W	3000K	120°	1100	110	419
				4000K	120°	1150	115	502
				6500K	120°	1300	130	461
FL01APCS	Anthracite grey RAL7016	PIR sensor	10W	3000K	120°	1100	110	419
				4000K	120°	1150	115	502
				6500K	120°	1300	130	461
FL01AXCS	Anthracite grey RAL7016	Standard	10W	3000K	120°	1100	110	419
				4000K	120°	1150	115	502
				6500K	120°	1300	130	461