






01604 495 151  
collingwoodlighting.com

-  collingwoodled
-  /collingwoodlighting
-  collingwoodlighting

# GL019

Up to 2W, 180lm mini ground light

## Features

IK rating	IK07
IP rating	IP68
CSP Switchable	Fixed colour
Walk Over / Drive Over	Walk over
LED Lifetime	70,000h L70
CRI	80 Ra
SDCM	3 SDCM

## Installation information

Cut Out Size	Ø 33mm
UK Bathroom Zone	0
Construction Material	Stainless steel (316)
Weight	204g
Maximum Ambient Temperature	50°C
Electric Class (1, 2, 3)	3

## Wiring information

Cable / Flying Lead	1m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series

## LED drivers

PLR/350 1-5	220-240V	Yes	No	0	1	5
PLD UNI-DRIVE 350MA	110-240V	Yes	Yes (1-10V)	2	1	10
PLU/700 3-9	220-240V	Yes	No	1	3	9

## Accessories

JB2 / JB4 / JB6	IP68 waterproof connectors	Sold Separately
TUBE332	Installation tube	Sold Separately
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types	Sold Separately

## Guarantee



7 year extended warranty

## Features & benefits

- 1W at 350mA or 2W at 700mA
- Coastal protected
- Low voltage ground light
- Compact yet powerful fitting
- Shallow depth for easy installation
- Robust cable for outdoor use

Light source energy efficiency: 

Beam angles: 12° 38°

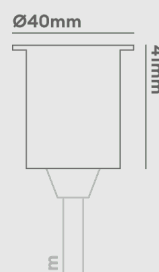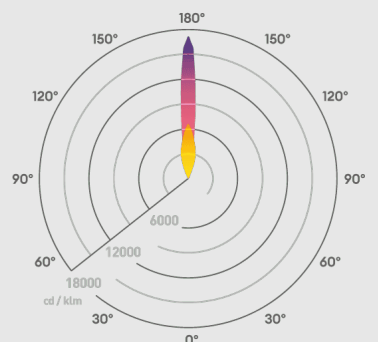






collingwood

Photometrics @ 25°C

Product code	Finish	Colour	Beam	350mA				700mA			
				W	lm	lm/W	lx @ 1m	W	lm	lm/W	lx @ 1m
GL019 F NW	Stainless steel	4000K	38°	1W	100	100	356	2W	180	90	641
GL019 S NW	Stainless steel	4000K	12°	1W	100	100	1715	2W	180	90	3087
GL019 F WW	Stainless steel	3000K	38°	1W	90	90	320	2W	150	75	534
GL019 S WW	Stainless steel	3000K	12°	1W	90	90	1543	2W	150	75	2572
GL019 F 27	Stainless steel	2700K	38°	1W	80	80	285	2W	130	65	463
GL019 S 27	Stainless steel	2700K	12°	1W	80	80	1372	2W	130	65	2229
GL019 F AMBER	Stainless steel	Amber	38°	1W	20	20	88	2W	-	-	-
GL019 F BLUE	Stainless steel	Blue	38°	1W	15	15	66	2W	25	13	110
GL019 F GREEN	Stainless steel	Green	38°	1W	80	80	352	2W	120	60	528
GL019 F RED	Stainless steel	Red	38°	1W	35	35	154	2W	-	-	-
GL019 S RED	Stainless steel	Red	12°	1W	35	35	712	2W	-	-	-
GL019BNBX27	Black	2700K	12°	1W	80	80	1372	2W	130	65	2229
GL019BNBX30	Black	3000K	12°	1W	90	90	1543	2W	150	75	2572
GL019BNBX40	Black	4000K	12°	1W	100	100	356	2W	180	90	641
GL019BNBXBL	Black	Blue	12°	1W	15	15	306	2W	25	13	509
GL019BWBX27	Black	2700K	38°	1W	80	80	285	2W	130	65	463
GL019BWBX30	Black	3000K	38°	1W	90	90	320	2W	150	75	534
GL019BWBX40	Black	4000K	38°	1W	100	100	356	2W	180	90	641
GL019BWBXBL	Black	Blue	38°	1W	15	15	66	2W	25	13	110
GL019AWBX27	Antique brass	2700K	38°	1W	80	80	285	2W	130	65	463
GL019AWBX30	Antique brass	3000K	38°	1W	90	90	320	2W	150	75	534
GL019ANBX27	Antique brass	2700K	12°	1W	80	80	1372	2W	130	65	2229
GL019ANBX30	Antique brass	3000K	12°	1W	90	90	1543	2W	150	75	2572

01604 495 151  
collingwoodlighting.com

-  collingwoodled
-  /collingwoodlighting
-  collingwoodlighting

**GL019**

Discreet yet powerful, this 1W LED powered ground light is perfect for decking areas, entrance halls and pathways. Indoors or out, the IP68 Stainless Steel finish ground light will give a flawless performance for many years of maintenance free operation. Available in four ambient LED colours, the GL019 is the most popular ground light in the Collingwood range.