






01604 495 151  
collingwoodlighting.com

-  collingwoodled
-  /collingwoodlighting
-  collingwoodlighting

# GL019

Up to 2W, 180lm mini ground light

## Features

IK rating	IK07
IP rating	IP68
CSP Switchable	Fixed colour
Walk Over / Drive Over	Walk over
LED Lifetime	70,000h L70
CRI	80 Ra
SDCM	3 SDCM

## Installation information

Cut Out Size	Ø 33mm
UK Bathroom Zone	0
Construction Material	Stainless steel (316)
Weight	204g
Maximum Ambient Temperature	50°C
Electric Class (1, 2, 3)	3

## Wiring information

Cable / Flying Lead	1m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series

## LED drivers

PLR/350 1-5	220-240V	Yes	No	0	1	5
PLD UNI-DRIVE 350MA	110-240V	Yes	Yes (1-10V)	2	1	10
PLU/700 3-9	220-240V	Yes	No	1	3	9

## Accessories

JB2 / JB4 / JB6	IP68 waterproof connectors	Sold Separately
TUBE332	Installation tube	Sold Separately
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types	Sold Separately

## Guarantee



7 year extended warranty

## Features & benefits

- 1W at 350mA or 2W at 700mA
- Coastal protected
- Low voltage ground light
- Compact yet powerful fitting
- Shallow depth for easy installation
- Robust cable for outdoor use

Light source energy efficiency: 

Beam angles: 12° 38°

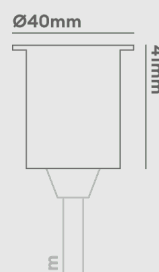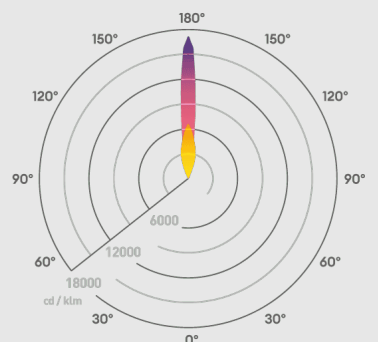



collingwood

Photometrics @ 25°C

	Finish	Colour	Beam	350mA				700mA			
				W	lm	lm/W	lx @ 1m	W	lm	lm/W	lx @ 1m
GL019 F NW	Stainless steel	4000K	38°	1W	100	100	356	2W	180	90	641
GL019 S NW	Stainless steel	4000K	12°	1W	100	100	1715	2W	180	90	3087
GL019 F WW	Stainless steel	3000K	38°	1W	90	90	320	2W	150	75	534
GL019 S WW	Stainless steel	3000K	12°	1W	90	90	1543	2W	150	75	2572
GL019 F 27	Stainless steel	2700K	38°	1W	80	80	285	2W	130	65	463
GL019 S 27	Stainless steel	2700K	12°	1W	80	80	1372	2W	130	65	2229
GL019 F AMBER	Stainless steel	Amber	38°	1W	20	20	88	2W	-	-	-
GL019 F BLUE	Stainless steel	Blue	38°	1W	15	15	66	2W	25	13	110
GL019 F GREEN	Stainless steel	Green	38°	1W	80	80	352	2W	120	60	528
GL019 F RED	Stainless steel	Red	38°	1W	35	35	154	2W	-	-	-
GL019 S RED	Stainless steel	Red	12°	1W	35	35	712	2W	-	-	-
GL019BNBX27	Black	2700K	12°	1W	80	80	1372	2W	130	65	2229
GL019BNBX30	Black	3000K	12°	1W	90	90	1543	2W	150	75	2572
GL019BNBX40	Black	4000K	12°	1W	100	100	356	2W	180	90	641
GL019BNBXBL	Black	Blue	12°	1W	15	15	306	2W	25	13	509
GL019BWBX27	Black	2700K	38°	1W	80	80	285	2W	130	65	463
GL019BWBX30	Black	3000K	38°	1W	90	90	320	2W	150	75	534
GL019BWBX40	Black	4000K	38°	1W	100	100	356	2W	180	90	641
GL019BWBXBL	Black	Blue	38°	1W	15	15	66	2W	25	13	110
GL019AWBX27	Antique brass	2700K	38°	1W	80	80	285	2W	130	65	463
GL019AWBX30	Antique brass	3000K	38°	1W	90	90	320	2W	150	75	534
GL019ANBX27	Antique brass	2700K	12°	1W	80	80	1372	2W	130	65	2229
GL019ANBX30	Antique brass	3000K	12°	1W	90	90	1543	2W	150	75	2572

01604 495 151  
collingwoodlighting.com

collingwoodled

/collingwoodlighting

collingwoodlighting

GL019

Discreet yet powerful, this 1W LED powered ground light is perfect for decking areas, entrance halls and pathways. Indoors or out, the IP68 Stainless Steel finish ground light will give a flawless performance for many years of maintenance free operation. Available in four ambient LED colours, the GL019 is the most popular ground light in the Collingwood range.