




## AT A GLANCE

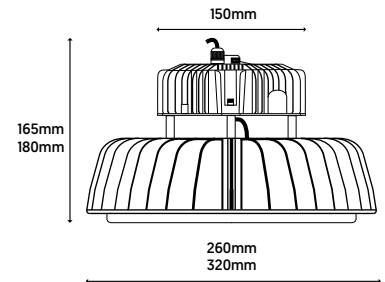

**BEAM DISTRIBUTION**

## ADDITIONAL INFORMATION

- Dimmable (1-10v as standard, DALI from factory)
- Integral emergency available
- Microwave sensor with lux sensitivity option available
- 6000K from stock (4000K limited availability)
- New lines complete with 1.5m AC flex



## UFO HIGH BAY

Specification	UFO 100W	UFO 150W	UFO 200W	UFO 240W
System Power	100W	150W	200W	240W
LED Chipset	Samsung	Samsung	Samsung	Samsung
Driver Manufacturer	Lifud	Lifud	Lifud	Lifud
Colour Rendering Index (CRI)	>85	>85	>85	>85
Lumen Output	14000Lm	21000Lm	28000Lm	33600Lm
LED Efficacy	140Lm/cW	140Lm/cW	140Lm/cW	140Lm/cW
Dimmable	1-10V	1-10V	1-10V	1-10V
Power Factor	>0.9	>0.9	>0.9	>0.9
IP Rating	IP65	IP65	IP65	IP65
IK Rating	IK08	IK08	IK08	IK08
Beam Spread	120°	120°	120°	120°
Colour Temperature	4000K/ 6000K	4000K/ 6000K	4000K/ 6000K	4000K/ 6000K
Housing Material	Aluminium	Aluminium	Aluminium	Aluminium
Diffuser Material	Tempered Glass	Tempered Glass	Tempered Glass	Tempered Glass
Operating Temperature	-20 to +50 °C	-20 to +50 °C	-20 to +50 °C	-20 to +50 °C
Input Voltage	AC 200-240V 47-63HZ	AC 200-240V 47-63HZ	AC 200-240V 47-63HZ	AC 200-240V 47-63HZ
Weight	3.3kg	3.8kg	4.8kg	5.3kg
Dimensions	Ø260mm x 165mm	Ø260mm x 165mm	Ø260mm x 165mm	Ø320mm x 180mm
ECA Scheme Compliant	Yes	Yes	Yes	Yes

### CODES:

GLOWUFO-100YY (100W)  
GLOWUFO-150YY (150W)  
GLOWUFO-200YY (200W)  
GLOWUFO-240YY (240W)

ADD /EM FOR EMERGENCY  
ADD /MS FOR MICROWAVE SENSOR  
ADD /ME FOR SENSOR & EMERGENCY

### DIMMING OPTIONS



Key: YY = Kelvin  
(NW for 4000k & CW for 6000k)

Additional colour temperatures and wattages available from factory