




Dimmer mounting kits include the mounting modules, locking nut, locking tool and knob.
For Dimmer Modules see page i82.

2 Module Dimmer Mounting Kit

GM150PW	2 Module Dimmer Mounting Kit - White
GM150BK	2 Module Dimmer Mounting Kit - Black
GM150PWBR	2 Module Dimmer Mounting Kit - White - Polished Brass
GM150PWBS	2 Module Dimmer Mounting Kit - White - Brushed Stainless
GM150PWCH	2 Module Dimmer Mounting Kit - White - Polished Chrome
GM150PWPN	2 Module Dimmer Mounting Kit - White - Pearl Nickel
GM150PWBS	2 Module Dimmer Mounting Kit - White - Satin Brass
GM150PWSC	2 Module Dimmer Mounting Kit - White - Satin Chrome
GM150PWSS	2 Module Dimmer Mounting Kit - White - Stainless Steel
GM150BKAB	2 Module Dimmer Mounting Kit - Black - Antique Brass
GM150BKBN	2 Module Dimmer Mounting Kit - Black - Black Nickel
GM150BKBR	2 Module Dimmer Mounting Kit - Black - Polished Brass
GM150BKBS	2 Module Dimmer Mounting Kit - Black - Brushed Stainless
GM150BKCH	2 Module Dimmer Mounting Kit - Black - Polished Chrome
GM150BKPN	2 Module Dimmer Mounting Kit - Black - Pearl Nickel
GM150BKSB	2 Module Dimmer Mounting Kit - Black - Satin Brass
GM150BKSC	2 Module Dimmer Mounting Kit - Black - Satin Chrome
GM150BKSS	2 Module Dimmer Mounting Kit - Black - Stainless Steel

Standards: Switch Modules: BS EN 60669-1
Back Box Depth: 47mm Minimum **Cable Size:** Dependant on Dimmer used

DIMENSIONS (mm)

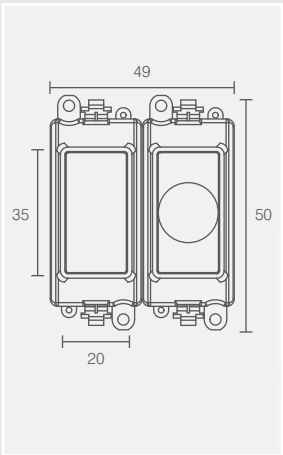

INSTALLATION



Suitable for rotary dimmer modules where the spindle is off centre and overlaps the next module space.
Suitable for plates with 2, 4, 8, 12, 18 or 24 apertures.

Material Composition	Mounting Kit: Nylon
Back Box Depth	47mm Minimum (Deco®, Deco Plus®, Mode®, Polar®, Define®, Definity®)
Modular	Yes
Warranty	10 Years
Antimicrobial Certified	No
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	BS 5733: 2010

Additional Information:
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.