


Technical Specification

Product Code: GM2014PWBS

Description: 20AX 2 Way Retractive Keyswitch Module

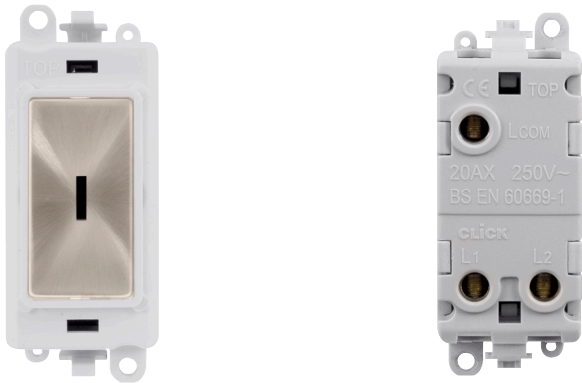

General Information

Dimensions	24.5mm (W) x 50mm (H) x 22.5mm (D)
Aperture Dimensions	20mm (W) x 35mm (H)
Module Frame Finish	Polar White
Module Finish	Brushed Stainless
Materials	Body & Insert: Nylon Switch: Nylon Insert Cover: Stainless Steel Terminals: Brass Terminal Screws: Steel & Yellow Passivated Contacts: Silver “on-lay” Copper / Brass Spring: Spring Steel
Maximum Voltage	250V 50Hz
Load Rating	20AX (Suitable For Inductive Loads)
Terminal Size	5mmø
Termination Type	Screw
Terminal Torque	1.2Nm
Terminal Capacity	3 x 2.5mm ² or 1 x 4mm ²
Switch Contact	Press to Make or Break
Back Box Depth	Dependent On Plate Used
Operational Temperature	-5°C to +40°C
Warranty	10 Years
Standards	BS EN 60669-1:2018

Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
 Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

UK Design Registration: 3015621