




Retractive switches are not suitable for use with fluorescent loads.

20AX 3 Position Retractive Switch Modules


GM2075PW	20AX 3 Position Retractive Switch Module - White
GM2075BK	20AX 3 Position Retractive Switch Module - Black
GM2075PWBR	20AX 3 Position Retractive Switch Module - White - Polished Brass
GM2075PWBS	20AX 3 Position Retractive Switch Module - White - Brushed Stainless
GM2075PWCH	20AX 3 Position Retractive Switch Module - White - Polished Chrome
GM2075PWPB	20AX 3 Position Retractive Switch Module - White - Pearl Nickel
GM2075PWSB	20AX 3 Position Retractive Switch Module - White - Satin Brass
GM2075PWSC	20AX 3 Position Retractive Switch Module - White - Satin Chrome
GM2075PWSS	20AX 3 Position Retractive Switch Module - White - Stainless Steel
GM2075BKAB	20AX 3 Position Retractive Switch Module - Black - Antique Brass
GM2075BKBN	20AX 3 Position Retractive Switch Module - Black - Black Nickel
GM2075BKBR	20AX 3 Position Retractive Switch Module - Black - Polished Brass
GM2075BKBS	20AX 3 Position Retractive Switch Module - Black - Brushed Stainless
GM2075BKCH	20AX 3 Position Retractive Switch Module - Black - Polished Chrome
GM2075BKPN	20AX 3 Position Retractive Switch Module - Black - Pearl Nickel
GM2075BKSB	20AX 3 Position Retractive Switch Module - Black - Satin Brass
GM2075BKSC	20AX 3 Position Retractive Switch Module - Black - Satin Chrome
GM2075BKSS	20AX 3 Position Retractive Switch Module - Black - Stainless Steel

Standards: Switch Modules: BS EN 60669-1
Back Box Depth: 25mm Minimum Cable Size: 2 x 4mm, 3 x 2.5mm, 1 x 6mm

DIMENSIONS (mm)

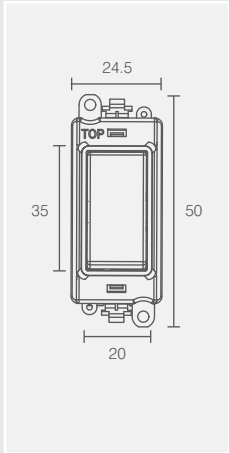

TYPICAL WIRING DIAGRAM

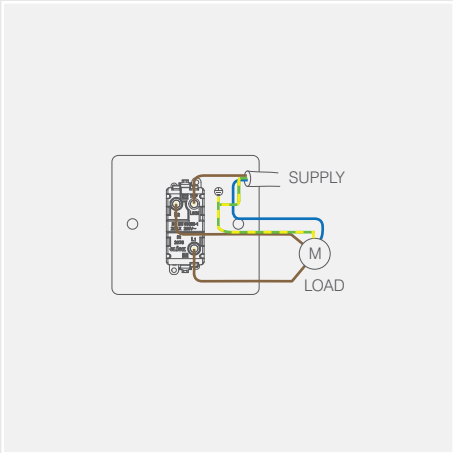

Material Composition

Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot)
Cover, Insert & Rear Housing: Nylon
Terminals: Brass
Terminal Screws: Steel & Yellow Passivated
Silver "on-lay" Copper / Brass Contacts

Voltage

250V ~ 50Hz

Current Rating

20AX

Terminal Size

5mm Ø

Torque Value

1.2Nm

Cable Size

2 x 4mm², 3 x 2.5mm² or 1 x 6mm²

Back Box Depth

25mm - 47mm (Deco®, Deco Plus®, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)

Modular

Yes

Warranty

10 Years

Antimicrobial Certified

Yes (Non Ingot Switches Only)

IP Rating

IP20

Operational Temperature

-5°C to +40°C

Standards

BS EN 60669-1:1999 + A1:2002 + A2:2008

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.