


Technical Specification

Product Code: GM2082PW
 Description: 240V~ Green Indicator Module

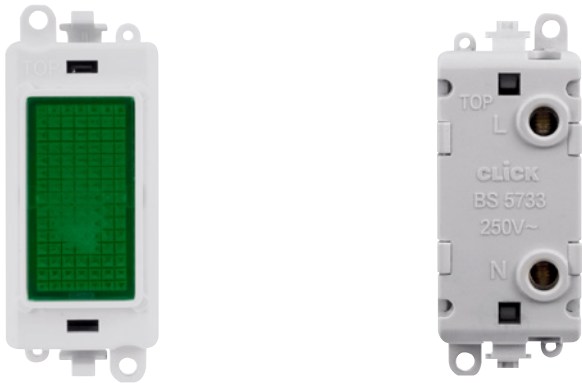

General Information

|                         |                                                                                                                    |
|-------------------------|--------------------------------------------------------------------------------------------------------------------|
| Dimensions              | 24.5mm (W) x 50mm (H) x 22.5mm (D)                                                                                 |
| Aperture Dimensions     | 20mm (W) x 35mm (H)                                                                                                |
| Module Frame Finish     | Polar White                                                                                                        |
| Module Finish           | Transparent Green                                                                                                  |
| Materials               | Body & Insert: Nylon<br>Neon Lens: Polycarbonate<br>Terminals: Brass<br>Terminal Screws: Steel & Yellow Passivated |
| Maximum Voltage         | 250V 50Hz                                                                                                          |
| Terminal Size           | 5mmø                                                                                                               |
| Terminal Torque         | 1.2Nm                                                                                                              |
| Terminal Capacity       | 3 x 2.5mm <sup>2</sup> or 1 x 4mm <sup>2</sup>                                                                     |
| Neon Indicator          | Yes (Green)                                                                                                        |
| Back Box Depth          | Dependent On Plate Used                                                                                            |
| Operational Temperature | -5°C to +40°C                                                                                                      |
| Warranty                | 10 Years                                                                                                           |
| Standards               | BS 5733: 2010                                                                                                      |

Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.  
 Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.