




GM2305/ GM2405/ GM2410/ GM2501

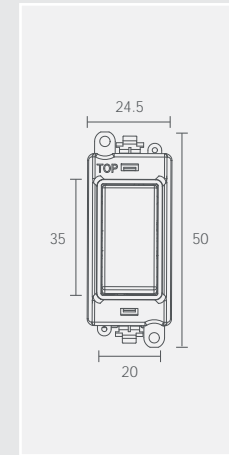

TV/Satellite Modules

- GM2305BK** VGA Module - Black
- GM2305PW** VGA Module - White
Flylead: 160mm overall length
- GM2405BK** Satellite Module - Black
- GM2405PW** Satellite Module - White
- GM2410BK** Non-Isolated Female Coaxial Module - Black
- GM2410PW** Non-Isolated Female Coaxial Module - White
- GM2415BK** Non-Isolated Male Coaxial Module - Black
- GM2415PW** Non-Isolated Male Coaxial Module - White
- GM2501BK** HDMI Module (V2.0) - Black
- GM2501PW** HDMI Module (V2.0) - White
Flylead: 145mm overall length

Material Composition

Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot)
Cover, Insert & Rear Housing: Nylon
Terminals: Brass
Terminal Screws: Steel & Yellow Passivated
Silver *on-lay* Copper / Brass Contacts

Voltage

250V – 50Hz

Current Rating

20AX (suitable for inductive loads)

Terminal Size

5mm ø

Torque Value

1.2Nm

Cable Size

2 x 4mm², 3 x 2.5mm² or 1 x 6mm²

Back Box Depth

25mm - 47mm (Deco®, Deco Plus, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)

Modular

Yes

Warranty

10 Years

Anti Microbial Certified

Yes (Non Ingot Switches Only)

IP Rating

IP20

Operational Temperature

-5°C to +40°C

Standards

The Low Voltage Directive 2014/35/EU BS EN 60669-1:1999 + A1:2002 + A2:2008

Additional Information:

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.

Standards: Switch Modules: BS EN 60669-1 Fuse Module: BS1363/4 Indicator Module: BS5733 Flex Outlet Module: BS5733
Back Box Depth: 16mm Minimum **Cable Size:** Dependant on module used **Warranty:** 1 Year
Dimensions: GM2305: 24.5mm x 50mm x 43mm GM2405: 24.5mm x 50mm x 20mm GM2410: 24.5mm x 50mm x 20mm
GM2415: 24.5mm x 50mm x 20mm GM2501: 24.5mm x 50mm x 45mm