


GM2460PW

GM2465PW

GM2470PW

GM2485PW

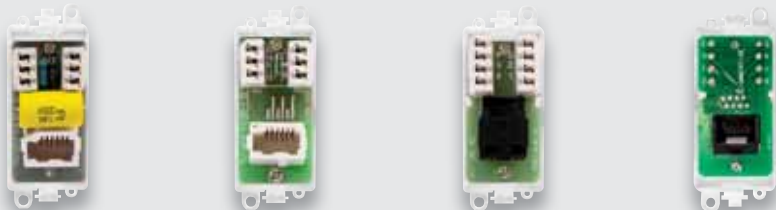


GM2460PW

GM2465PW

GM2470PW

GM2485PW MODULE BACK

GM2460/ GM2465/ GM2470 / GM2485

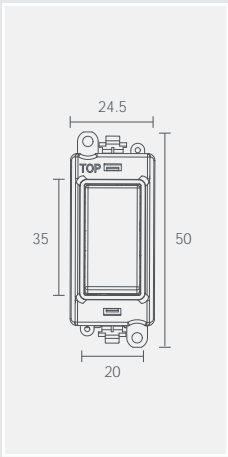

Telephone/Data Modules

- GM2460BK Telephone Socket Module (Master) - Black
- GM2460PW Telephone Socket Module (Master) - White
- GM2465BK Telephone Socket Module (Secondary) - Black
- GM2465PW Telephone Socket Module (Secondary) - White
- GM2470BK RJ11 Module - Black
- GM2470PW RJ11 Module -White
- GM2485BK RJ45 Cat-6 Module - Black
- GM2485PW RJ45 Cat-6 Module - White

Standards: Switch Modules: BS EN 60669-1 Fuse Module: BS1363/4 Indicator Module: BS5733 Flex Outlet Module: BS5733
Back Box Depth: 16mm Minimum **Cable Size:** Dependant on module used **Warranty:** 1 Year
Dimensions: GM2460: 24.5mm x 50mm x 18mm GM2465: 24.5mm x 50mm x 18mm GM2470: 24.5mm x 50mm x 16mm
GM2485: 24.5mm x 50mm x 17.5mm

Material Composition

Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot)
Cover, Insert & Rear Housing: Nylon
Terminals: Brass
Terminal Screws: Steel & Yellow Passivated
Silver "on-lay" Copper / Brass Contacts

- Voltage 250V – 50Hz
- Current Rating 20AX (suitable for inductive loads)
- Terminal Size 5mm ø
- Torque Value 1.2Nm
- Cable Size 2 x 4mm², 3 x 2.5mm² or 1 x 6mm²
- Back Box Depth 25mm - 47mm (Deco®, Deco Plus, Mode®, Polar®) 35mm - 47mm (Define®, Definity®)
- Modular Yes
- Warranty 10 Years
- Anti Microbial Certified Yes (Non Ingot Switches Only)
- IP Rating IP20
- Operational Temperature -5°C to +40°C
- Standards The Low Voltage Directive 2014/35/EU BS EN 60669-1:1999 + A1:2002 + A2:2008

Additional Information:
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20AX; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.