


King Joint Y

Branch joints, including armoured cable



Product	BRANCH CONNECTIONS Cable formation and conductor cross sections (n° x mm²)		Ø max cables (mm)		Dimensions A x B x C (mm)
	T	B	T	B	
- King Joint Y6 - King Joint Y6 - ARM	2 x 1,5 - 6	2 x 1,5 - 4	22,5	18,5	138 x 60 x 37
	3 x 1,5 - 6	3 x 1,5 - 4			
	4 x 1,5 - 6	4 x 1,5 - 4			
	5 x 1,5 - 6	5 x 1,5 - 4			

T: Through cable - B: Branch cable

Product	BRANCH CONNECTIONS Cable formation and conductor cross sections (n° x mm²)		Ø max cables (mm)		Dimensions A x B x C (mm)
	T	B	T	B	
- King Joint Y16 - King Joint Y16 - ARM	2 x 4 - 16	2 x 1,5 - 4	26	18,5	194 x 74 x 43
	3 x 4 - 16	3 x 1,5 - 4			
	4 x 4 - 16*	4 x 1,5 - 4			
	5 x 4 - 16*	5 x 1,5 - 4			

T: Through cable - B: Branch cable


* For armoured cables max conductor cross section 10 mm².

Product	BRANCH CONNECTIONS Cable formation and conductor cross sections (n° x mm²)		Ø max cables (mm)		Dimensions A x B x C (mm)
	T	B	T	B	
- King Joint Y35 - King Joint Y35 - ARM	2 x 10 - 35	2 x 1,5 - 6	36	26	290 x 105 x 51
	3 x 10 - 35	3 x 1,5 - 6			
	4 x 10 - 35*	4 x 1,5 - 6			

T: Through cable - B: Branch cable

* For armoured cables max conductor cross section 25 mm².

ARM type joints complete with continuity device suitable for connection to **armoured wire or steel tape cables**.

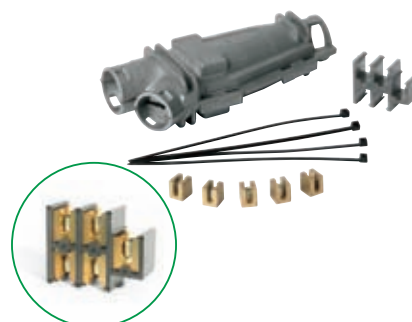

Installation sequence King Joint Y

