


# Technical Specification

**Product Code:** MD023PW

**Description:** 20A Double Pole Switch With Neon Module

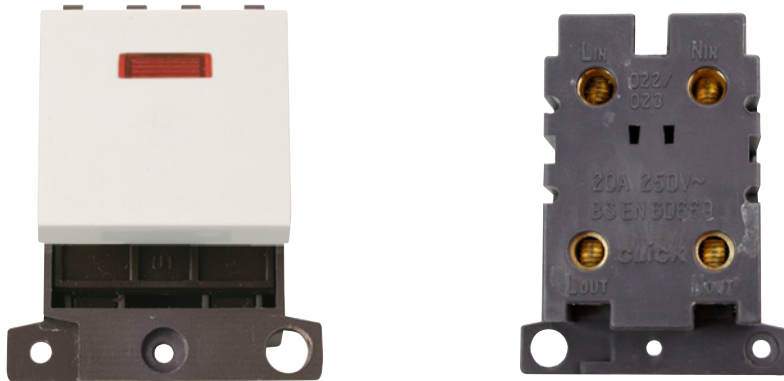

## General Information

<b>Dimensions</b>	41mm (W) x 52.5mm (H) x 22mm (D)
<b>Aperture Dimensions</b>	32mm (W) x 31.5mm (H)
<b>Finish</b>	Polar White
<b>Materials</b>	Rocker Switch: Urea Rear Housing: Nylon Neon Cover: Polycarbonate Terminals: Brass Terminal Screws: Steel & Yellow Passivated Contacts: Silver "on-lay" Copper / Brass Internal Busbars: Formed Pressed Brass
<b>Maximum Voltage</b>	250V 50Hz
<b>Load Rating</b>	20A
<b>Terminal Size</b>	4.4mmø
<b>Terminal Torque</b>	1.2Nm
<b>Terminal Capacity</b>	4 x 1.5mm <sup>2</sup> or 2 x 2.5mm <sup>2</sup>
<b>Neon Indicator</b>	Yes (Orange)
<b>Back Box Depth</b>	Dependent On Plate Used
<b>Operational Temperature</b>	-5°C to +40°C
<b>Warranty</b>	10 Years
<b>Standards</b>	BS EN 60669-1:1999 +A1:2002 +A2:2008

## Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.  
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.  
Suitable and matches the Definity, Mode, Polar & Part M ranges