


Product Code: MM002BK

Description: 10AX 2 Way Switch Module

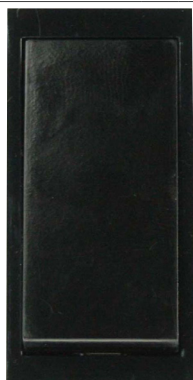

General Information

Dimensions	25mm (W) x 50mm (H) x 22mm (D)
Module Finish	Black
Materials	Cover & Housing: Polycarbonate Terminals: Brass Terminal Screws: Steel & Yellow Passivated Contacts: Silver "on-lay" Copper / Brass Internal Busbars: Formed Pressed Brass
Maximum Voltage	250V~ 50Hz
Load Rating	10AX (Suitable for Inductive Loads)
Terminal Size	5mmø
Terminal Torque	1.8Nm
Terminal Capacity	4 x 1.5mm ² or 3 x 2.5mm ²
Ingress Protection	IP20
Back Box Depth	Dependent on Plate Used
Termination Type	Screw
Operational Temperature	-5°C to +40°C
Warranty	1 Year
Standards	BS EN 60669-1:1999 +A1:2002 +A2:2008

Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.