


**Product Code:** MM030WH

**Description:** 15A 110V US Socket Outlet Module

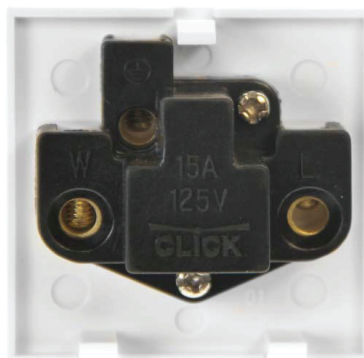

## General Information

|                                |                                                                                                                                            |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Dimensions</b>              | 50mm (W) x 50mm (H) x 25.5mm (D)                                                                                                           |
| <b>Module Finish</b>           | Polar White                                                                                                                                |
| <b>Materials</b>               | Cover & Housing: Polycarbonate<br>Terminals: Brass<br>Terminal Screws: Steel & Yellow Passivated<br>Internal Busbars: Formed Pressed Brass |
| <b>Maximum Voltage</b>         | 125V~                                                                                                                                      |
| <b>Load Rating</b>             | 15A                                                                                                                                        |
| <b>Terminal Size</b>           | 5mmø                                                                                                                                       |
| <b>Terminal Torque</b>         | 1.2Nm                                                                                                                                      |
| <b>Terminal Capacity</b>       | 3 x 2.5mm <sup>2</sup> or 2 x 4mm <sup>2</sup>                                                                                             |
| <b>Ingress Protection</b>      | IP20                                                                                                                                       |
| <b>Back Box Depth</b>          | Dependent on Plate Used                                                                                                                    |
| <b>Termination Type</b>        | Screw                                                                                                                                      |
| <b>Operational Temperature</b> | -5°C to +40°C                                                                                                                              |
| <b>Warranty</b>                | 1 Year                                                                                                                                     |
| <b>Standards</b>               | UL 498                                                                                                                                     |

## Additional Information

The US module requires a 125V 60Hz supply for use with US appliance plugs. Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.