


Product Code: MM586GY

Luckinslive 435925679

Description: 2A Type A & 3A Type C USB Dual Charging Module

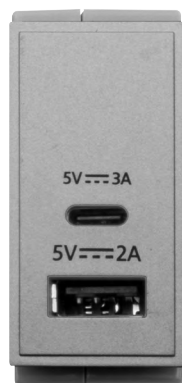

## General Information

|                                 |                                                              |                                |
|---------------------------------|--------------------------------------------------------------|--------------------------------|
| Dimensions (mm)                 | 25 (W) x 55.7 (H) x 37 (D)                                   |                                |
| Colour                          | Grey                                                         |                                |
| Materials                       | Cover & Housing: Polycarbonate<br>PCB: Electronic Components | Terminals& Screws: Brass       |
| Anti Microbial Certified        | No                                                           |                                |
| Operating Voltage (AC)          | 100-240                                                      | Frequency (Hz) 50/60           |
| Resistive Load Rating (A)       | 2 & 3                                                        |                                |
| USB Output Type                 | USB Type 'A' & Type 'C'                                      |                                |
| USB Number Of Outputs           | 2                                                            | USB Charging Total Load (A) 5  |
| USB Charging Voltage (V DC)     | 5                                                            | USB Standby Current (W) 0.075  |
| Termination Type                | Screw                                                        |                                |
| Terminal Size (mm)              | Ø3.5                                                         | Terminal Torque Value (Nm) 0.4 |
| Terminal Capacity - Solid (mm²) | 0.75 to 2.5                                                  |                                |
| Product Marking                 | 5V 2A & 5V 3A                                                |                                |
| Minimum Back Box Depth (mm)     | 35 (47 Flat Plate)                                           |                                |
| Ingress Protection              | IP20                                                         |                                |
| Operational Temperature (°C)    | 0 to +40                                                     |                                |
| Warranty (Years)                | 2                                                            |                                |

**Standards** BS IEC 62368-1, BS EN 61000-6-1, BS EN 61000-6-3

## Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.  
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.  
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.  
Internally fused which enables direct mains supply.

