

5.5W Dimmable IP65 LED Fixed Downlights



AVAILABLE FINISHES



| CODE        | DESCRIPTION                            |
|-------------|--|
| OV3500WH5WD | Fixed Downlight - 2700K - White        |
| OV3500CH5WD | Fixed Downlight - 2700K - Chrome       |
| OV3500SC5WD | Fixed Downlight - 2700K - Satin Chrome |
| OV3500WH5CD | Fixed Downlight - 4000K - White        |
| OV3500CH5CD | Fixed Downlight - 4000K - Chrome       |
| OV3500SC5CD | Fixed Downlight - 4000K - Satin Chrome |


| COMPATIBLE PRODUCTS |   |         |
|---------------------|---|---------|
| OVSP4120**          | 130mm Diameter (65mm Aperture) Converter Plates               | page 38 |
| OVEMCG2305M3        | 3 Hour Universal Emergency Pack with prewired Flow Connectors | page 50 |

COLOUR TEMPERATURE



PRODUCT INFO

|                |               |        |
|----------------|---------------|--------|
| CCT (K)        | 2700K         | 4000K  |
| Lumens         | 230lm         | 360lm  |
| Efficacy       | 63lm/W        | 70lm/W |
| Wattage        | 5.5W          |        |
| CRI            | >80           |        |
| Beam Angle     | 90°           |        |
| LED Lifetime   | 20,000 Hours  |        |
| Voltage        | 220-240V ~    |        |
| Frequency      | 50/60Hz       |        |
| Dimmable       | Yes           |        |
| Operating Temp | -15°C - +40°C |        |

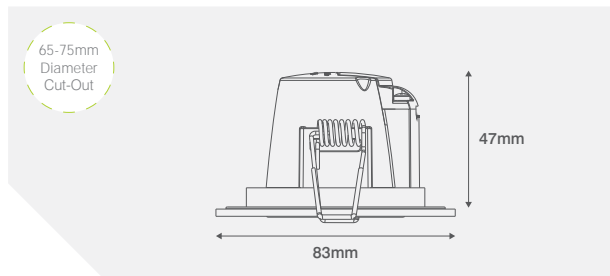

With loop-in & out terminals

PRODUCT APPROVALS

EN 60598-1 EN 60598-2-2 EN 62493



5.5W Fire Rated Dimmable IP65 LED Fixed Downlights

AVAILABLE FINISHES



| CODE        | DESCRIPTION                                       |
|-------------|---|
| OV3600WH5WD | Fire Rated Fixed Downlight - 2700K - White        |
| OV3600CH5WD | Fire Rated Fixed Downlight - 2700K - Chrome       |
| OV3600SC5WD | Fire Rated Fixed Downlight - 2700K - Satin Chrome |
| OV3600WH5CD | Fire Rated Fixed Downlight - 4000K - White        |
| OV3600CH5CD | Fire Rated Fixed Downlight - 4000K - Chrome       |
| OV3600SC5CD | Fire Rated Fixed Downlight - 4000K - Satin Chrome |


PRODUCT INFO

|                |               |        |
|----------------|---------------|--------|
| CCT (K)        | 2700K         | 4000K  |
| Lumens         | 230lm         | 360lm  |
| Efficacy       | 63lm/W        | 70lm/W |
| Wattage        | 5.5W          |        |
| CRI            | >80           |        |
| Beam Angle     | 90°           |        |
| LED Lifetime   | 20,000 Hours  |        |
| Voltage        | 220-240V ~    |        |
| Frequency      | 50/60Hz       |        |
| Dimmable       | Yes           |        |
| Operating Temp | -15°C - +40°C |        |

PRODUCT APPROVALS

IEC 60598-1 IEC 60598-2-2 IEC 61347-2-13  
Fire Rating 30, 60 & 90 minutes Acoustic Rating 0dB (zero impact on sound insulation) Air Flow BS 5250: 2011 compliant

| COMPATIBLE PRODUCTS |   |         |
|---------------------|---|---------|
| OVSP3120**          | 130mm Diameter (75mm Aperture) Converter Plate                | page 38 |
| OVISC1020           | Insulation Support Bracket                                    | page 39 |
| OVEMCG2305M3        | 3 Hour Universal Emergency Pack with prewired Flow Connectors | page 50 |

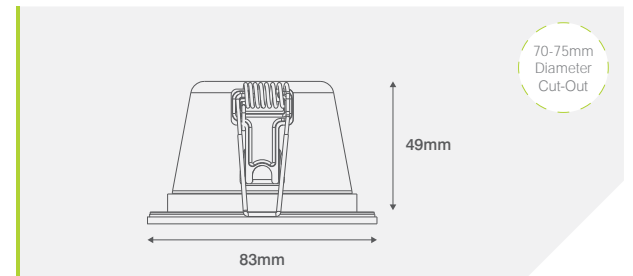

Supplied with 300mm flylead

