

INCEPTOR® SLATE BACKLIT

TP(a) RATED BACKLIT PANEL LIGHTS

The Inceptor® Slate Backlit has a low UGR diffuser with a TP(a) thermoplastic rating, making it suitable for all working environments.



Diffuser

Available in Standard or Low-Glare to disperse light outwards.

LED Covers

48 opaque covers for uniform light distribution

Back

Steel, formed with a strengthening rib for added rigidity.

**UGR19
VERSION
AVAILABLE**

Features & Benefits



5 Year
Warranty



Weatherproof
Rating



Flame
Resistance



Dimmable
Available

INCEPTOR® SLATE BACKLIT

TP(a) RATED BACKLIT PANEL LIGHTS



Warm White
Colour Temp



Cool White
Colour Temp



Daylight
Colour Temp



120°
Beam Angle



50,000 Hrs
Lifetime


TP(a) Materials

The Building Regulations Approved Document B2 (buildings other than dwelling houses) places restrictions on the use of certain thermoplastic materials when they are used as lighting diffusers and form part of a ceiling. TP(a) rated materials may be used almost without restriction, but restrictions exist on the use of TP(b) rated materials. Inceptor® Slate ceiling panels are TP(a) as standard.



Pre-wired Flow™ Connector

The Inceptor® Slate Backlit includes an pre-wired push-fit 3 Pole Flow™ connector for quick and easy installation.

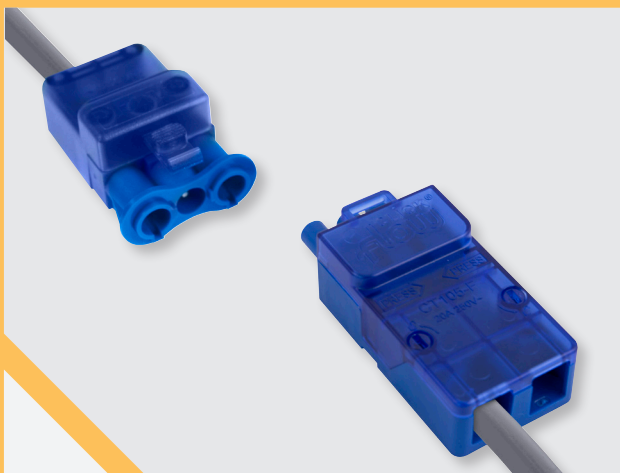

Installation Options

Suitable for a range of installation types; a Suspension Kit & Recessed Frames are available for use with the Inceptor® Slate Backlit ceiling panels.

