

# PLXE

Panel Heater



## Installation

Detachable wall-mounting 'H' bracket.

## IP Rating

IPX4.

## Cable Entry Point

Bottom right. 1m cable length.

## Thermal Cut-out

Auto-reset type.

## Element

Compact, finned, mineral-filled sheathed type, providing virtually silent operation.

## Construction



Durable epoxy-polyester powder coated steel casing, with forward facing grille. Temperature resistant PBT thermoplastic moulded parts.

## Controls

Lot 20 compliant with electronic seven day time and temperature.

## Colour

White.

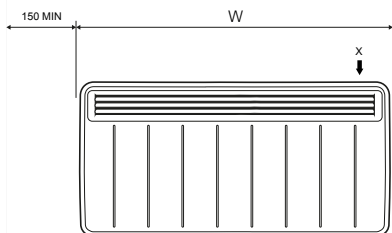

Model	Output (kW)	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)
PLX050E	0.5	430	450	108	4.6
PLX075E	0.75	430	620	108	5.9
PLX100E	1	430	620	108	5.9
PLX125E	1.25	430	690	108	6.1
PLX150E	1.5	430	690	108	6.1
PLX200E	2	430	860	108	7.8
PLX300E	3	430	860	143	8.7