

Polo II Surface Luminaire




Polo II - a sleek, modular bulkhead lighting solution featuring a patent-pending twist & lock diffuser. It offers customizable wattage and CCT, IP65 ingress protection, IK10 vandal resistance, and a new optional modular emergency driver that clips seamlessly into the bulkhead. Other optional features include a click-in microwave sensor for added functionality.

* Click-in microwave sensor

* Optional Plug-in Emergency module that quickly clicks & locks into place

Hinged integrated LED tray with quick-lock release

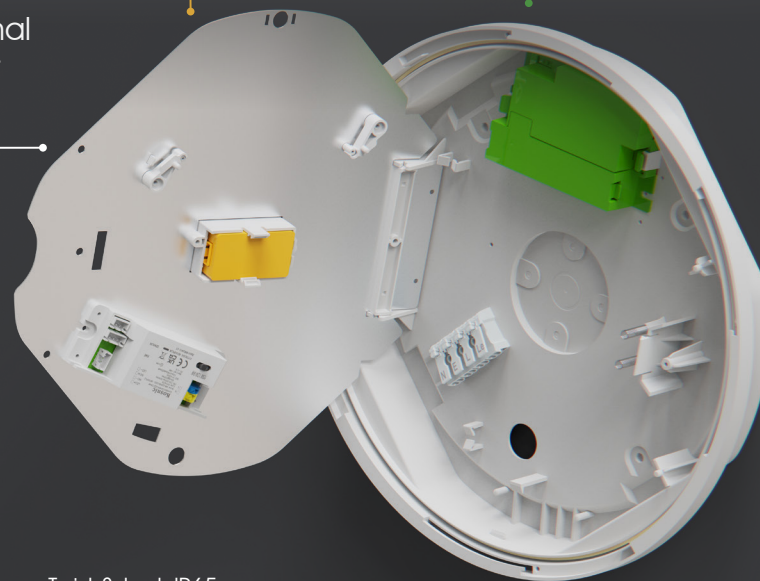

Twist & lock IP65 diffuser for fast installation & maintenance

* Optional accessories not included with the product; purchase separately.



Interchangeable clip-on ring options



5 5 Years
Product Warranty

2 2 Years
On-Site Warranty

1000V
Surge Protection


DALI & PUSH
Dimmable Options

CCT Switch



The CCT switch is located at front of gear tray same side as LEDs

Wattage Switch



The wattage switch is located at back of gear tray on the LED driver case

Recommended




DD EME II ↪ P67



Lulu
(Mounting height ≤ 6m)
↪ P21



POL2-MWS



Uni-Remote
RMT-UNI

Polo II

NEW Available
Apr. 2025

Twist & Lock IP65 bulkhead with integrated LED tray

- High efficiency up to 140lm/W
- Switchable wattage and CCT (3000/3500/4000/5000K)
- Choice of alternative decorative trims
- Optional plug-in microwave corridor sensor compatible with Uni-Remote
- Optional plug-in microwave ON/OFF sensor
- Optional plug-in emergency modules, available in standard, self-test and DALI
- DALI and PUSH dimming alternative driver available
- Twist & lock diffuser for fast installation
- BESA box fitting points
- IP65 and vandal resistant (IK10)



Wattage switching



CCT switching



Plug-in emergency



Plug-in corridor sensor



Plug-in ON/OFF sensor



Interchangeable ring



Flicker-free



Modular design




Uni-Remote Compatible


Up to
140 $\frac{\text{lm}}{\text{W}}$



▲ White detachable polo ring included



Polo (Matt Black)
POL2P-BLK

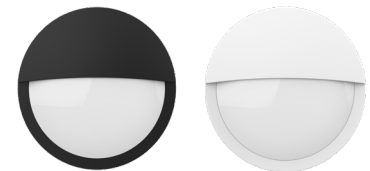

Eyelid (Black, White)
POL2LID-BLK, POL2LID-WHT

Polo II

Order Code	Default Power	Alternative Power	CCT	Lumen
POL215	-	9W		1170lm (3000K)
				1215lm (3500K)
				1215lm (4000K)
				1260lm (5000K)
	12W	-	Switchable*	1560lm (3000K)
				1620lm (3500K)
				1620lm (4000K)
				1680lm (5000K)
	-	15W		1950lm (3000K)
				2025lm (3500K)
				2025lm (4000K)
				2100lm (5000K)

* When CCT switchable, colour temperature switches between 3000K, 3500K, 4000K & 5000K

Polo II DALI

Suffix	Description
/DA	DALI & PUSH dimming for POL215

Polo

Order Code	Default Power	Alternative Power	CCT	Lumen
POL15	-	9W	Switchable*	830lm (3000K)
				900lm (4000K)
				840lm (5000K)
	12W	-		1080lm (3000K)
				1210lm (4000K)
				1110lm (5000K)
	-	15W		1290lm (3000K)
				1510lm (4000K)
				1360lm (5000K)

Optional Gears

Type	Order Code	Description
Emergency module	EMDD202	Standard emergency module, LiFePO4 battery
Emergency module	EMDD202/SST	Standard & Self-test 2 in 1 emergency module, LiFePO4 battery
DALI-2 Emergency module	EMDD202/DA	DALI-2 emergency module, LiFePO4 battery
Microwave Sensor	LUL-M/D	ON/OFF, Dimming (PWM)
Microwave Sensor	POL2-MWS	Plug-in ON/OFF Microwave Sensor for POL215

Accessory

Type	Order Code	Description
Remote Control	RMT-UNI	Universal Remote Control for LUL-M/D

Clip-on rings

Order Code	POL2P-BLK	POL2LID-BLK	POL2LID-WHT

Patent

General Specification

Voltage	220-240Vac 50/60Hz
CRI	82
SDCM	6
L80B10 Lifetime	101000h
Power Factor	0.90
Ambient Temp	-20°C to 50°C
Housing	Polycarbonate
Diffuser	ABS



Order Code

POL215-SCT
POL215-SCT/DA

POL15-SCT

Dimensions

