

AVIOR SURFACE EMERGENCY DOWNLIGHT, OPEN AREA, CORRIDOR 2W, IP20



CORRIDOR LENS



PRODUCT INFORMATION DOCUMENT

FEATURES

- Available in white and black
- Maintained emergency downlight with self-test function
- High quality Osram LED
- Complete with Open Area (Anti Panic) and Corridor lenses with 150° and 170x50° beam angle respectively
- 3 hour emergency duration
- LiFePO4 battery technology provides fast charging and high number of charge/discharge cycles
- 5 years battery warranty

CONSTRUCTION

- Polycarbonate housing and diffuser
- Push-in connector block



Product Code:	RAV3ST-01		RAV3ST-04
White			
Black			
Comparable to:	20W halogen		20W halogen
Total Power (W):	2.3		2.3
Power Factor:	NA		NA
Total Light Output (lm):	NA		NA
Total Emergency Light Output (lm):	230		190
Efficacy (lm/cctW):	NA		NA
Lux at 1m (lux):	NA		NA
Emergency Lux at 1m (lux):	50		40
CCT (K):	6500		6500
CRI:	70		70
IP:	20		20
Operation Temperature (°C):	0 ≤ Ta ≤ +40		0 ≤ Ta ≤ +40
Inrush Current:	25A/1ms		25A/1ms
RG Value:	0		0
SDCM:	<6		<6
P _{st} LM:	NA		NA
SVM:	NA		NA
Energy Class:	NA		NA
Rated Life to L70B50 (Hrs):	30000		30000
Dimensions ØxH (mm):	150x44		150x44
Weight (kg):	0.3		0.3

Separate Control Gear Information	
Type of Light Source:	NA
Full Load Efficiency (%):	NA
P _{NET} (W):	NA
Dimensions (mm):	NA

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
NZ: TEL: +64 03 668 5285

WEB: ROB.US.COM
WEB: ROB.US.COM
WEB: ROB.US.COM.AU
WEB: ROB.USLED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA

AVIOR SURFACE EMERGENCY
DOWNLIGHT, OPEN AREA, CORRIDOR
2W, IP20

Cone Illuminance Diagram

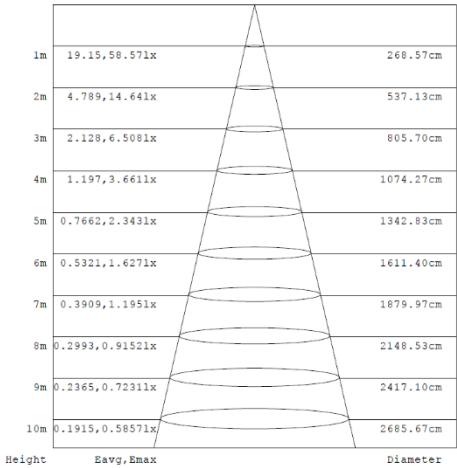


Diagram for RAV3ST-01 in 6500K. Other diagrams available on request

Polar Intensity Diagram


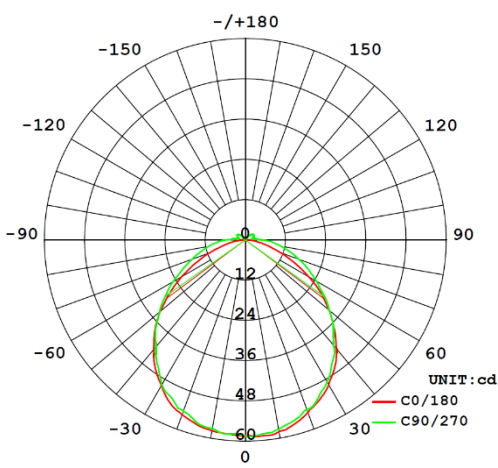


Diagram for RAV3ST-01 in 6500K. Other diagrams available on request

Dimension Diagram

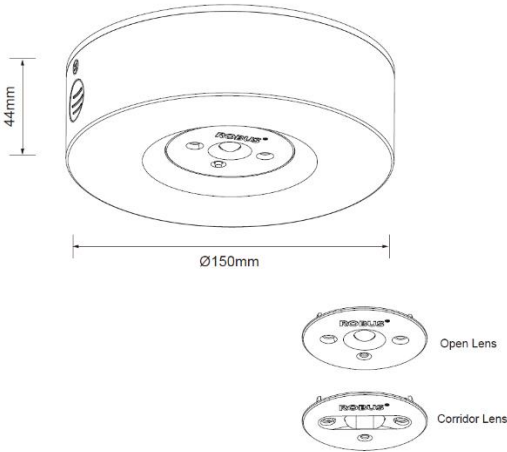

Accessories

Luminaire Spacing (m) On Emergency Escape Routes				
Mounting Height (m)	Axial(to wall)		Axial to axial	
	0.5 Lux	1 Lux	0.5 Lux	1 Lux
2.5	9	7	18	14
3	9.5	7.5	19	15
4	10	8	20	16
Luminaire Spacing (m) In Anti Panic Open Areas (Incl 0.5m Border Area)				
Mounting Height (m)	Transverse to wall	Transverse to transverse	Axial to wall	Axial to axial
	0.5 Lux	0.5 Lux	0.5 Lux	0.5 Lux
2.5	6	12	6	12
3	6.5	13	6.5	13
4	7	14	7	14

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000 WEB: ROB.US.COM
UK: TEL: 0800 973 220 WEB: ROB.US.COM
AUS: TEL: +61 7 3890 5444 WEB: ROB.US.COM.AU
NZ: TEL: +64 03 668 5285 WEB: ROB.USLED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA