


LIGHTING CONTROLS

Lighting Controls facilitating safety, security and cost control for your lighting project

WHITE MICROWAVE SENSOR & ENCLOSURE

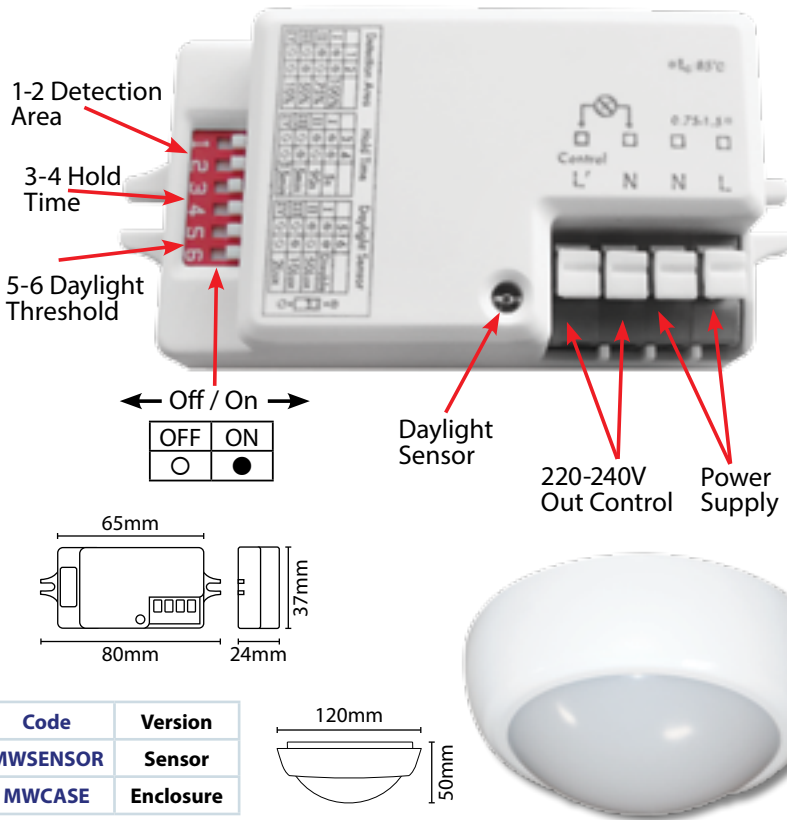

This sensor can either be wired directly into an existing fitting providing there is sufficient space to do so or alternatively it can be installed inside a separate unobtrusive enclosure, see Eterna part code MWCASE.

- Polycarbonate construction
- Rated Load - 800W (resistive), 400W (capacitive), 270W (LED)
- Adjustable detection angle: 30-150°
- Power consumption: <0.5W
- Adjustable detection range: Max. 10m
- Adjustable time setting: 5 seconds - 15 minutes
- Adjustable Lux control: 2-50 lux
- Push connect terminals: for ease of connection
- **MWSENSOR** = M.O.M: 1 / O.P.Q: 150

IP65 ENCLOSURE FOR MICROWAVE SENSOR

- Polycarbonate construction
- Compact & discreet design: for housing Eterna part code MWSENSOR
- IP65, ceiling or wall mounted: giving versatile fixing options, suitable for bathroom, internal and external use
- Supplied with two mounting screws to install MWSENSOR and has 2 x 20mm gland entry holes: facilitating easy installation
- Screw fit cover to maintain IP rating, with clip on bezel: meaning enclosure cannot be tampered with easily
- **MWCASE** = M.O.M: 1 / O.P.Q: 100

IP20 MINIATURE PHOTOCELLS

- Thermoplastic construction
- 1500VA or 5 Amp inductive load at 60MFD
- Switch on/off at 30/80 lux
- Hole cut out size: 20mm
- M.O.M: 1 / O.P.Q: 5


Code	Colour
EMPC	Clear
EMPCR	Black

EMPC

- Compact design: allows incorporation in many different fittings

EMPCR

- Wired for remote fixing: ultra compact sensor head allows incorporation where space is extremely limited

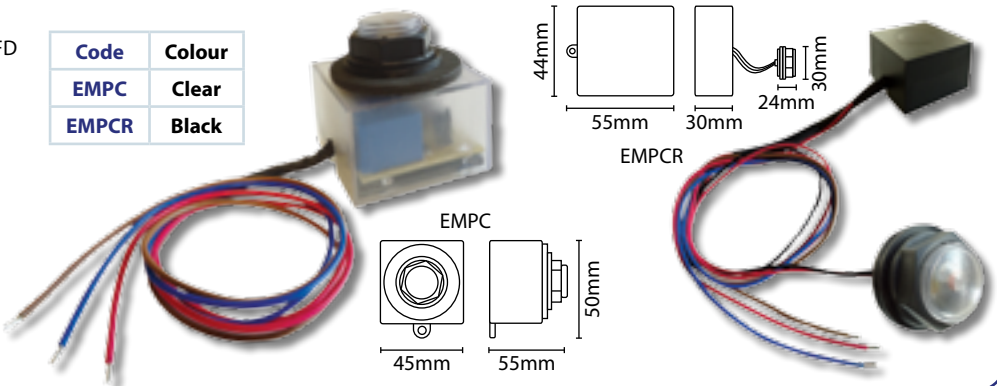

BLACK IP44 NEMA SOCKET ELECTRONIC PHOTOCELLS

- Thermoplastic construction
- Electronic operation: improved accuracy over thermal types
- 1500VA or 5 Amp inductive load at 60MFD
- Max LED load: 1000W
- Switch on/off at 30/70 lux
- **NPCH**: M.O.M: 5 / O.P.Q: 50
- **NPCHKIT**: M.O.M: 1 / O.P.Q: 5

Code	Version
NPCH	Standard
NPCHKIT	Kit

NPCHKIT

- Supplied complete with mounting bracket and gasket

