



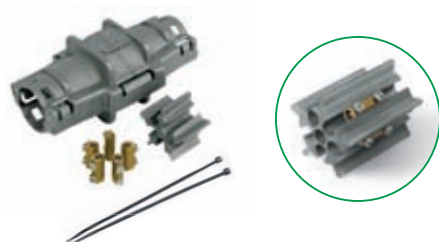

King Joint

Straight and branch joints




Product	Cable formation and conductor cross sections (n° x mm ²)		Ø max cables (mm)	Dimensions A x B x C (mm)
	Straight Connections In line	Branch connections T B		
King Joint 0	2 x 1,5 - 6	- -	20,5	105 x 55 x 55
	3 x 1,5 - 6			
	4 x 1,5 - 6			
	5 x 1,5 - 6			

T: Through cable - B: Branch cable




Product	Cable formation and conductor cross sections (n° x mm ²)		Ø max cables (mm)	Dimensions A x B x C (mm)
	Straight Connections In line	Branch connections T B		
King Joint 1	2 x 1,5 - 6	2 x 4 2 x 2,5	20,5	150 x 56 x 30
	3 x 1,5 - 6	3 x 4 3 x 2,5		
	4 x 1,5 - 6	4 x 4 4 x 2,5		
	5 x 1,5 - 6	5 x 4 5 x 2,5		

T: Through cable - B: Branch cable

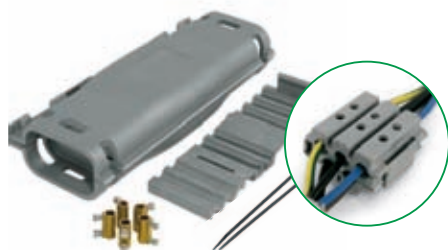

Product	Cable formation and conductor cross sections (n° x mm ²)		Ø max cables (mm)	Dimensions A x B x C (mm)
	Straight Connections Crimp connectors Screw connectors	Branch connections T B		
King Joint 2	2 x 4 - 25 2 x 4 - 16	2 x 10 2 x 6	30	220 x 85 x 46
	3 x 4 - 25 3 x 4 - 16	3 x 10 3 x 6		
	4 x 4 - 25 4 x 4 - 16	4 x 10 4 x 6		
	5 x 4 - 25 5 x 4 - 16	5 x 10 5 x 6		

T: Through cable - B: Branch cable

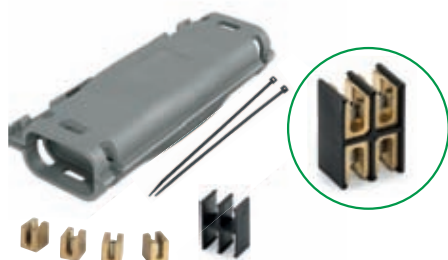

Product	Cable formation and conductor cross sections (n° x mm ²)		Ø max cables (mm)	Dimensions A x B x C (mm)
	Straight Connections In line	Branch connections T B		
King Joint 3	-	2 x 4 - 25 2 x 1,5 - 4	30	220 x 85 x 46
		3 x 4 - 25 3 x 1,5 - 4		
		4 x 4 - 25 4 x 1,5 - 4		

T: Through cable - B: Branch cable

Installation sequence of King Joint 1 and 2 separator

