


# Technical Specification

**Product Code:** VPSC402BK

**Description:** 1 Gang MiniGrid® Unfurnished Plate - 2 Apertures

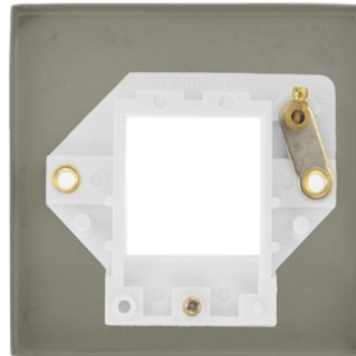

Representative Image

## General Information

<b>Dimensions</b>	88mm (W) x 88mm (H) x 8mm (D)
<b>Dimensions With Gasket</b>	91mm (W) x 91mm (H) x 9mm (D)
<b>Plate Design &amp; Finish</b>	Victorian Satin Chrome
<b>Insert &amp; Gasket Colour</b>	Black
<b>Materials</b>	Front Plate: Stainless Steel Insert: Urea Terminals: Brass Terminal Screws: Steel & Yellow Passivated Earth Strap: Mild Steel Gasket: Nylon
<b>Plate Fixing Centres</b>	60.3mm
<b>Ingress Protection</b>	IP20
<b>Back Box Depth</b>	Dependent On Modules Fitted
<b>Operational Temperature</b>	-5°C to +40°C
<b>Warranty</b>	10 Years
<b>Standards</b>	BS 5733: 2010

## Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.  
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.  
Interchangeable with modules in the MiniGrid Range.