

## wall mounting socket outlet - housing dimensions 126x83




Product description	
BALS-Prd.-Nr	11313
EAN	4024941113137
Product group	Wall mounting socket outlet
Current	32A
Number of poles	3p
Arrangement of the phases	3P+PE
Earth 'clock' position	6 h
Voltage	200 up to 250V
Frequency	50 and 60Hz

Product description	
Protection degree	IP67
Colour code	blue
Colour of appliance	Hinged lid blue, Bayonet ring grey, Housing bottom grey, Housing top grey
Connection design	screw terminal
Maximum conductor size	10,0 qmm
Cable entry	1x Top entry M25 2x Bottom entry M25
Dimension of enclosure	126x83 mm (HxW)
Material of enclosure	Polyamide

Logistics data	
Weight/pcs	0.398 kg / piece
Packaging	bag
Content amount	1 ST
EAN	4024941113137
Length	410 mm
Width	285 mm
Weight	0.398 kg
Packaging	carton
Content amount	10 ST
EAN	4024941946339
Length	335 mm

Logistics data	
Width	283 mm
Height	268 mm
Weight	4.33 kg
Volume	21,937.5 ccm

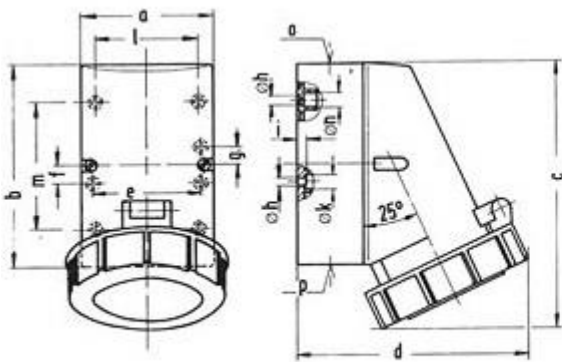

Amperes Poles	16			32		
	3	4	5	3	4	5
a	64	75	75	83	83	83
b	87	100	100	126	126	126
c	115	130	130	160	160	160
d	103	110	115	129	129	135
e	51	59	59	68	68	68
f	20	11	11	11	11	11
g	20	-	-	-	-	-
øh	4.1	5.1	5.1	5.5	5.5	5.5
i	4.5	4.5	4.5	6.5	6.5	6.5
øk	8	10	10	12	12	12
l	-	-	-	65	65	65
m	-	-	-	80	80	80
ø n	-	-	-	10	10	10
o	M20	M20	M20	M25	M25	M25
p	M20	M20	M20	2xM25	2xM25	2xM25
Conductor mm <sup>2</sup> min	1.5	1.5	1.5	2.5	2.5	2.5
Conductor mm <sup>2</sup> max	4	4	4	10	10	10