

90962

## Hoxton Ground Recessed LED

### FEATURES



- 3 years (2 years + 1 year) extended warranty
- Construction and finish: brushed stainless steel (304) & clear glass
- Tilt light head 20°
- IP67
- IK08

### SPEC DATA


|                             |                        |
|-----------------------------|------------------------|
| Product Wattage:            | 6.5W                   |
| Product Lumen:              | 600                    |
| Lumen/W:                    | 92.3                   |
| Kelvin:                     | 3000K                  |
| Energy Rating:              | D                      |
| Dimmable:                   | No                     |
| Beam Angle:                 | 38°                    |
| CRI:                        | 80                     |
| Lifetime (Hours):           | 20000                  |
| SDCM:                       | 6                      |
| Driver Type:                | Constant Current 300mA |
| Inrush Current at Start Up: | ≤ 15A                  |
| Product Voltage:            | 220-240V               |
| Hertz:                      | 50/60                  |
| Power Factor:               | 0.9                    |
| Surge Protection (KV):      | 1.5                    |
| Operating Temp.:            | -20 to 40 Degree       |
| Product Weight (KG):        | 0.75                   |
| Class:                      | 1                      |
| Cut Hole Dia:               | 105mm                  |
| Minimum cavity depth:       | 125mm                  |

### ACCESSORIES

- 90131, Inline IP68 connector straight
- 90132, Inline IP68 connector tee

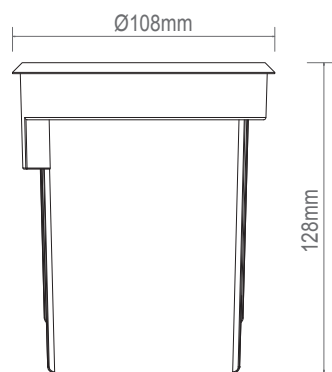

supplied housing

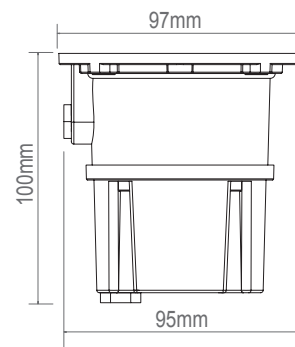

LED body