


Product Code: SFBZ425BK

Description: 10AX Ingot 1 Gang Intermediate Plate Switch

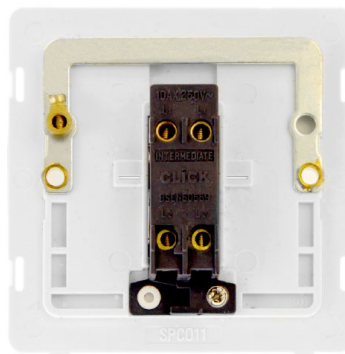

### General Information

Insert Dimensions (mm)	82.5 (W) x 82.5 (H) x 2.5 (D)	
Plate Dimensions (mm)	86 (W) x 86 (H) x 4 (D)	
Plate Fixing Centres - Horizontal (mm)	60.3	
MiniGrid Plate (Gang)	1	
MiniGrid Single Width Module Quantity	1	
MiniGrid Double Width Module Quantity	0	
Style	Screwless Complete	
Finish	Matt Bronze	
Insert Colour	Black	
Compatible Cover Plate	SCP401#	
Materials	Cover Plate: Stainless Steel Switch Cover: Stainless Steel Terminals: Brass Contacts: Silver "on-lay" Copper / Brass Earth Strap: Mild Steel	Insert: Polycarbonate Rear Housing: Nylon Terminal Screws: Steel & Yellow Passivated Internal Busbars: Formed Pressed Brass
Anti Microbial Certified	No	
Operating Voltage (AC)	250	Frequency (Hz) 50
Inductive Load Rating (AX)	10	
Load Rating Comments	Suitable for Fluorescent or Inductive Loads	
Termination Type	Screw	
Terminal Size (mm)	Ø3.5	Terminal Torque Value (Nm) 0.5
Terminal Capacity - Solid (mm²)	4 x 1.5 or 2 x 2.5	
Intermediate Switch	Yes	
Minimum Back Box Depth (mm)	25	
Ingress Protection	IP20	
Operational Temperature (°C)	-5 to +40	
Warranty (Years)	20	

**Standards** BS EN 60669-1

### Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Interchangeable with modules in the MiniGrid Range.

